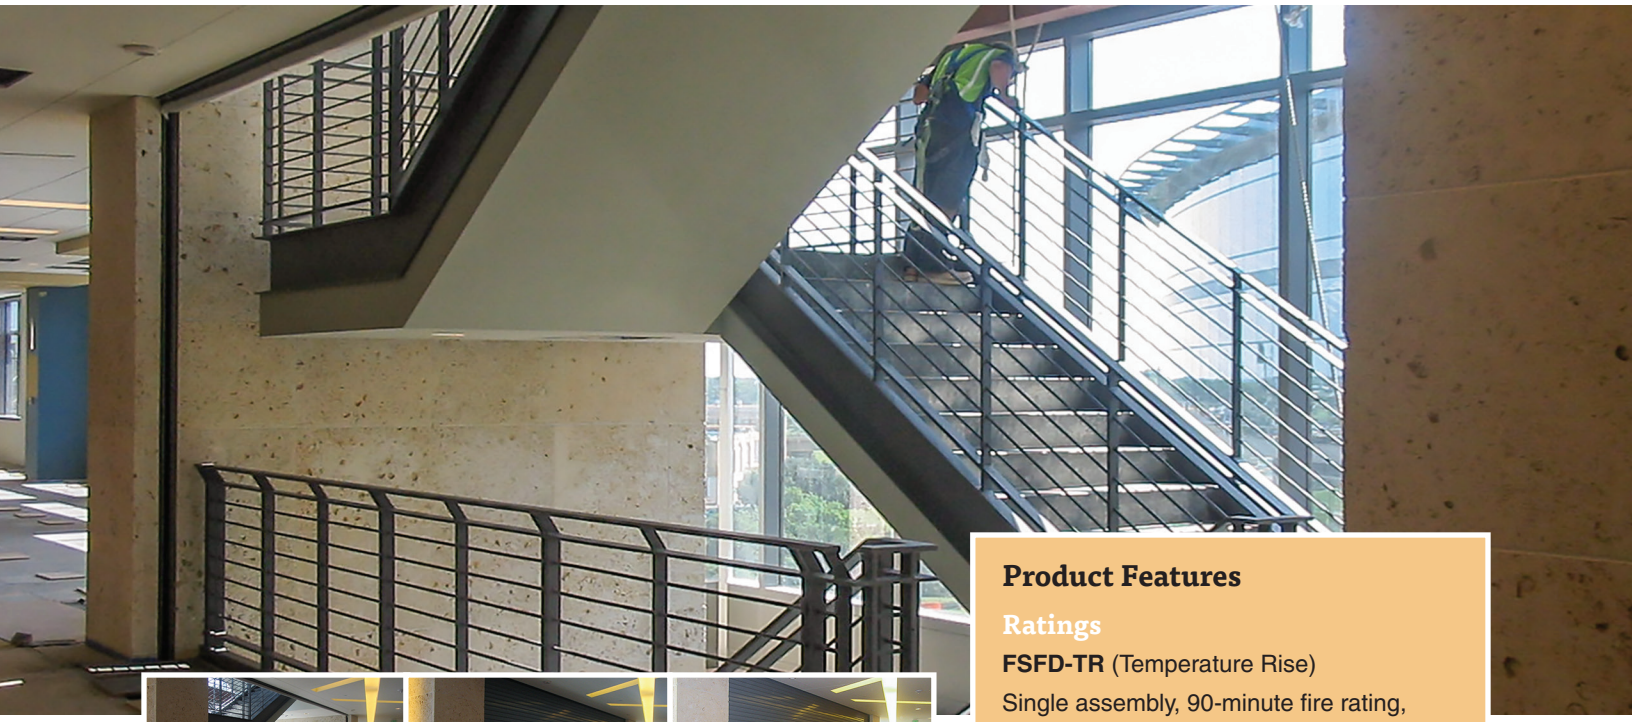

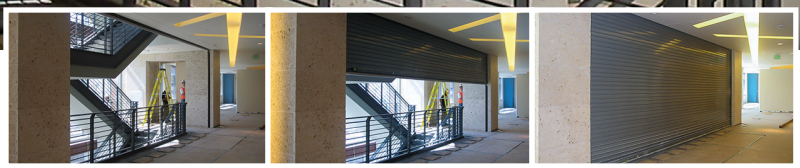

Auto-Set® FSFD-TR

Vertical Coiling without Egress

The Auto-Set® Model FSFD-TR is designed for use in areas where a Temperature Rise rating in addition to standard fire ratings is required. Available with up to a 450° F over 30 minute Temperature Rise rating when required, it meets building code requirements for fire doors used in exit enclosures and exit passageways of non-sprinklered buildings.

Product Features

Ratings

FSFD-TR (Temperature Rise)

Single assembly, 90-minute fire rating, available with a temperature rise rating of 650°F over 30 minutes when required

Double assembly positioned back-to-back, 4-hour fire rating, available with a temperature rise rating of 450°F over 30 minutes when required

Code Compliance

CCRR-1086

Operation

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Based upon door size, available with hand-chain or hand-crank operation

Size

Unlimited heights and widths to 80'; for larger sizes and custom configurations consult the factory

Finishes

McKEON Sterling Gray

Powder Coat of any color as selected

Stainless Steel – No. 4 Polish or No. 8 Mirror

This technology is the subject of US Patent No. 8,453,707

FSFD-TR

VERTICAL ACTING FIRE DOOR SYSTEMS

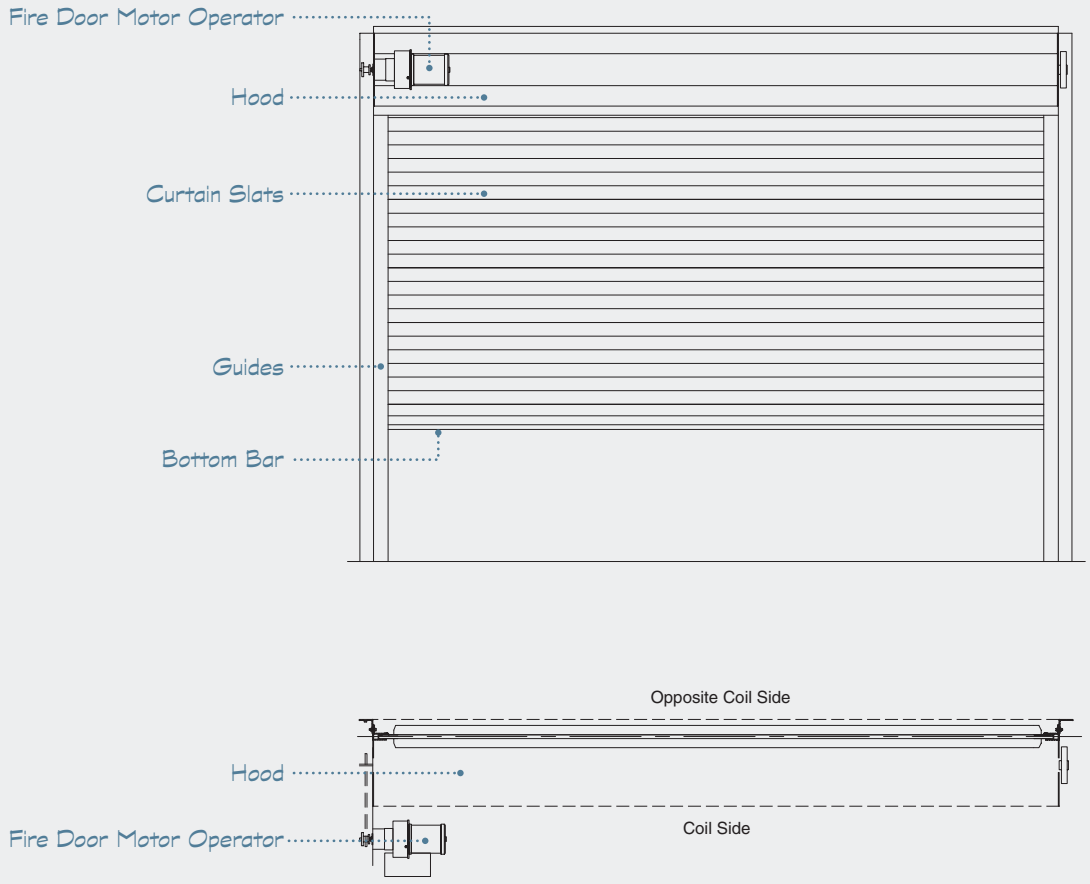

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
FSFD	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Fire Door
FSFD-IS	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Insulated Fire Door
FSFD-STC	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Sound Rated Fire Door
FSFD-TR	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Temperature Rise Rated Fire Door

McKEON®
44 Sawgrass Drive, Bellport, NY 11713 | 800.266.9392 | www.mckeondoor.com | info@mckeondoor.com

FSFD