VERTICAL ACTING FIRE DOOR SYSTEMS



Auto-Set® FSFD-IS

Vertical Coiling without Egress

The Auto-Set® Model FSFD-IS is designed for interior or exterior applications where fire protection is necessary and climate and temperature control are also critical. Available with an R value up to 9.3, the highest in the industry.

Product Features

Ratings

3-hour rated UL 10B Smoke & Draft labeled UL 1784 Thermal protection with an R value up to 9.3

Code Compliance

CCRR-1086

Operation

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Based upon door size, available with hand-chain or hand-crank operation

Size

Unlimited heights and widths to 80'; for larger sizes and custom configurations consult the factory

Finishes

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel – No. 4 Polish or

No. 8 Mirror

This technology is the subject of US Patent No. 8,453,707.

VERTICAL ACTING FIRE DOOR SYSTEMS

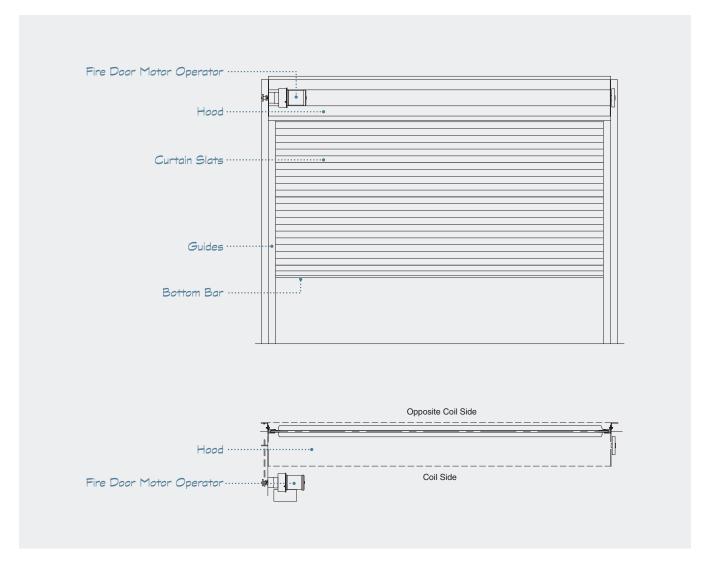

| MODEL | OPEN | SELF-CLOSE | EGRESS | FUNCTION |
|----------|--------------------------|----------------------|--------|----------------------------------|
| FSFD | Auto-Set® Power Operator | Fail-Safe Mechanical | N/A | Fire Door |
| FSFD-IS | Auto-Set® Power Operator | Fail-Safe Mechanical | N/A | Insulated Fire Door |
| FSFD-STC | Auto-Set® Power Operator | Fail-Safe Mechanical | N/A | Sound Rated Fire Door |
| FSFD-TR | Auto-Set® Power Operator | Fail-Safe Mechanical | N/A | Temperature Rise Rated Fire Door |