


VERTICAL ACTING FIRE DOOR SYSTEMS

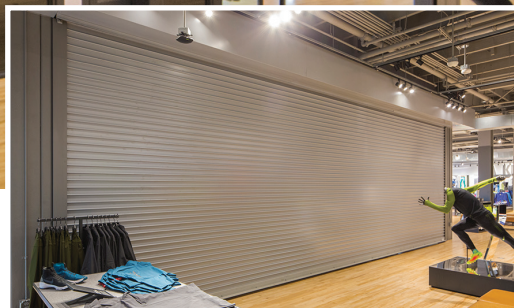

Auto-Set® FSFD

Vertical Coiling without Egress

The McKEON Auto-Set® Model FSFD is recommended in situations where fire and smoke protection is required but emergency egress is not an issue. The vertically acting fire door is UL, Intertek and Factory Mutual classified for up to four hours in both masonry and dry wall applications.

Product Features

Ratings

Up to 4-hour rated UL 10B*

Smoke & Draft labeled UL 1784

*Listed under the Canadian equivalent CAN/ULC S104

Code Compliance

CCRR-1086

Operation

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Based upon door size, available with hand-chain or hand-crank operation

Size

Unlimited heights and widths to 80'; for larger sizes and custom configurations consult the factory

Finishes

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel – No. 4 Polish or
No. 8 Mirror

This technology is the subject of US Patent No. 8,453,707.

FSFD

VERTICAL ACTING FIRE DOOR SYSTEMS

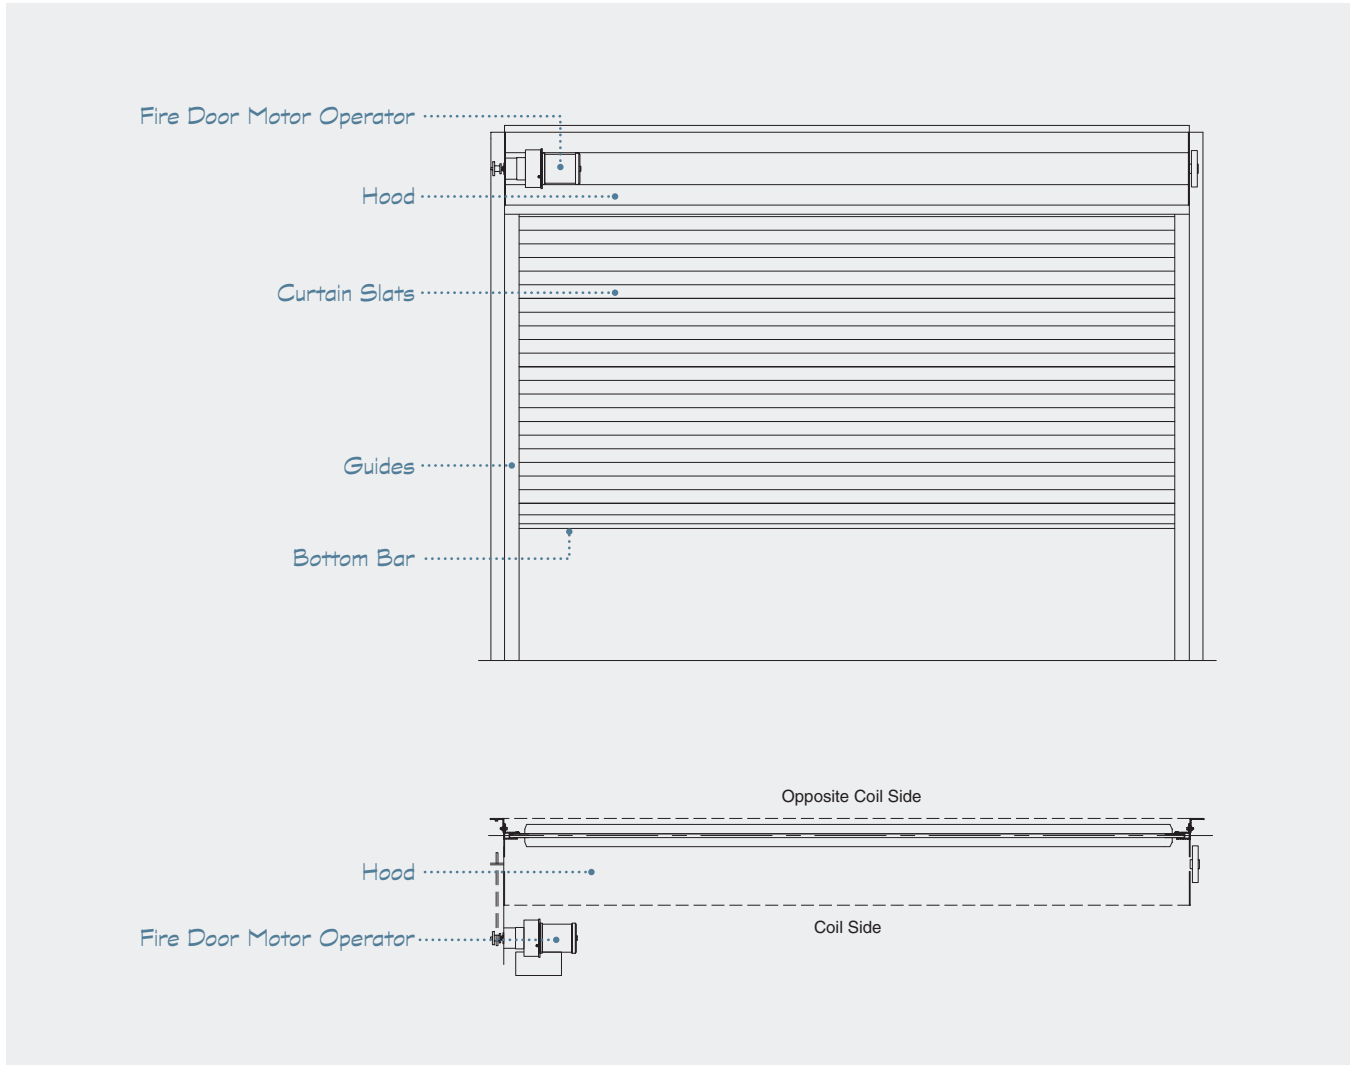

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
FSFD	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Fire Door
FSFD-IS	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Insulated Fire Door
FSFD-STC	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Sound Rated Fire Door
FSFD-TR	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Temperature Rise Rated Fire Door



44 Sawgrass Drive, Bellport, NY 11713 | 800.266.9392 | www.McKeonDoor.com | Info@McKeonDoor.com

FSFD