


## FIRE & SMOKE RATED CURTAIN SYSTEMS

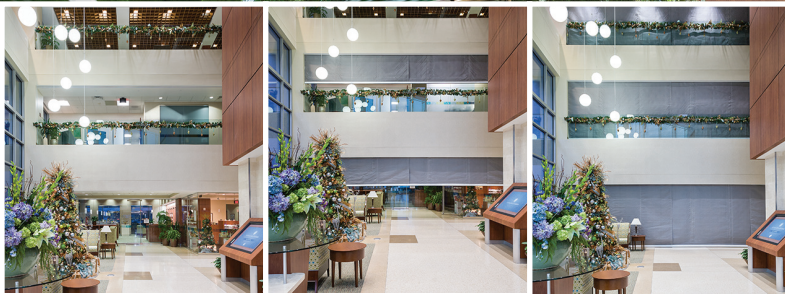

# FireFighter® Model D200

Vertical Coiling Opening Protective w/out Egress

The D200 is an opening protective made of a flexible fire-rated fabric that is US laboratory tested and approved for unlimited widths. A first in the industry, the D200 carries a 20-minute rating UL10B and UL10C without hose stream, UL 10D for up to 3 hours, and UL 1784 for smoke and draft. FireFighter D200 is approved for use in multiple applications.

### Product Features

#### Fire & Smoke Ratings

20-minute rated UL 10B & 10C without hose stream

Up to 3-hour rated UL 10D

UL 1784 tested and listed without an artificial bottom seal

#### Code Compliance

Code Compliance Research Report  
CCRR-0455

#### Operation

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

#### Size

Unlimited widths and heights

#### Finishes (metal components only)

McKEON Sterling Gray

Powder Coat of any color as selected


Stainless Steel – No. 4 Polish or

No. 8 Mirror



This technology is the subject of US Patent No. 10,145,174 and has additional patents pending.

# D200

# FIRE & SMOKE RATED CURTAIN SYSTEMS

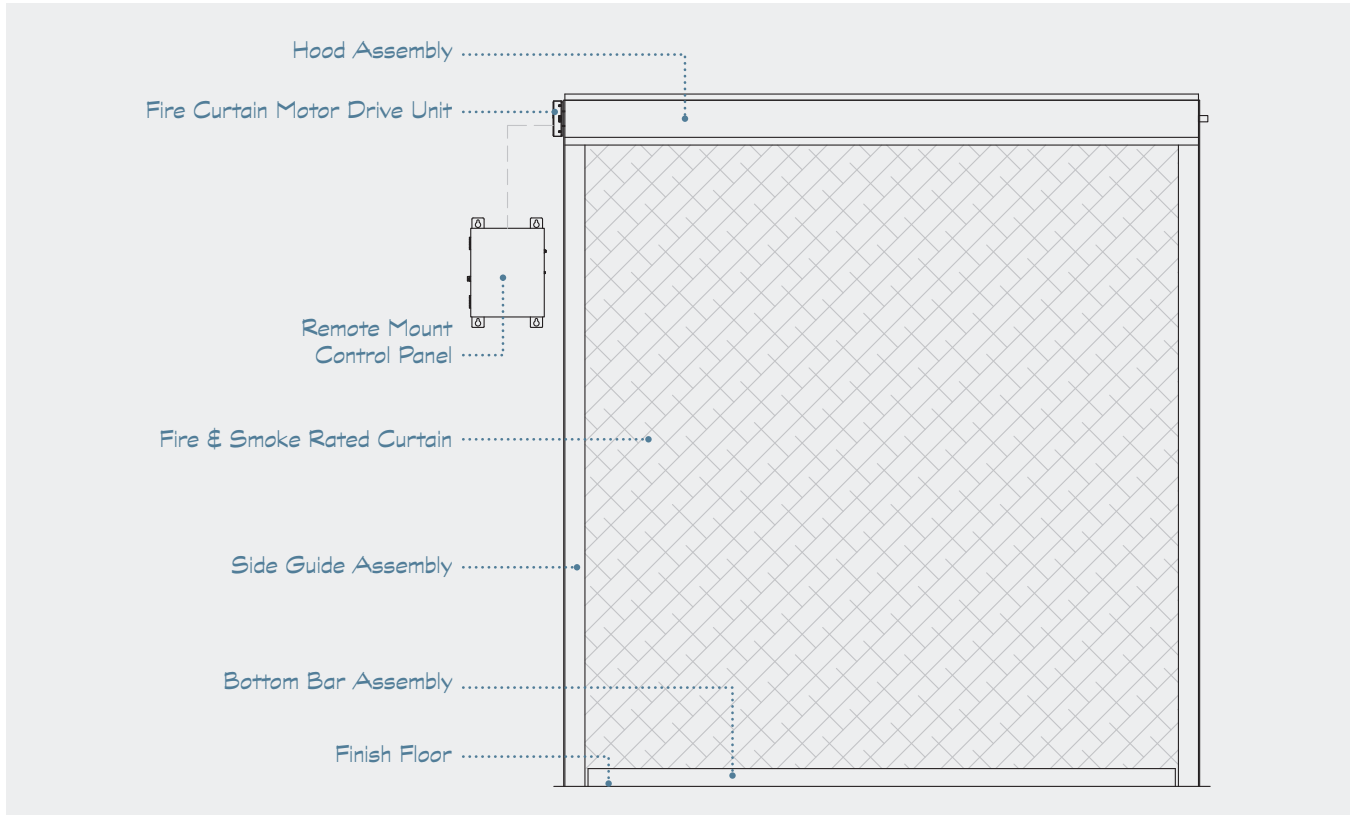

The McKEON D200 side guide configuration, with a maximum of a 3/8" reveal, can be surface or flush mounted making it virtually invisible in any application.

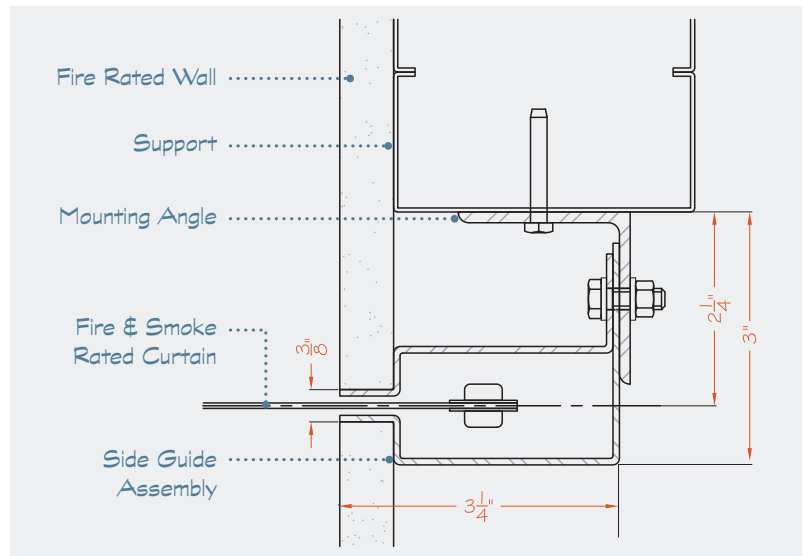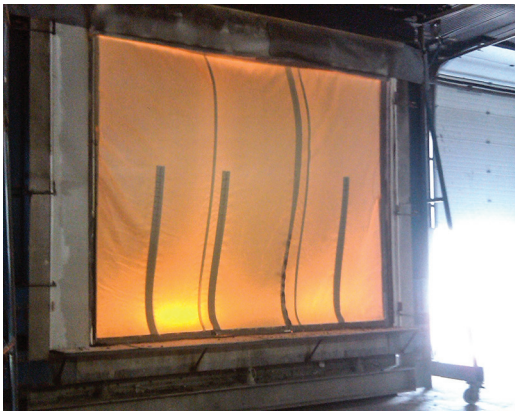

MODEL	OPEN	SELF-CLOSE	EGRESS
D200	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A



44 Sawgrass Drive, Bellport, NY 11713 | 800.266.9392 | [www.McKeonDoor.com](http://www.McKeonDoor.com) | [Info@McKeonDoor.com](mailto:Info@McKeonDoor.com)

D2000