

VERTICAL ACTING FIRE DOOR SYSTEMS



Safescape® T2000 Series

Vertical Coiling with Deployable Egress

The Safescape® T2000 is a vertical coiling fire and smoke rated door system that incorporates either one or two deployable complying swinging egress doors. Flush mounted in an adjacent wall, complying swinging egress doors deploy and lock into position at the command of an alarm condition. Once in place the integral egress doors and frames serve as side guides to accommodate a 3-hour roll-down door assembly that descends at a governed rate of speed. Within seconds a 3-hour opening protective with single or dual swinging egress doors stands ready to fight fire and smoke.

Product Features

Ratings

3-hour rated UL 10B*

90-minute rated assembly available with a 650° F over 30 minutes Temperature Rise rating when required

Smoke & Draft labeled UL 1784

*Listed under the Canadian equivalent CAN/ULC S104

Code Compliance

CCRR-1086

ADA compliant

Egress

Available with up to 2 complying swinging egress doors

Operation

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Size

Unlimited heights and widths to 60'; for larger sizes and custom configurations consult the factory

Finishes

McKEON Sterling Gray

Powder Coat of any color as selected


Stainless Steel – No. 4 Polish or

No. 8 Mirror

This technology is the subject of US Patent No. 7,490,654

T2000

VERTICAL ACTING FIRE DOOR SYSTEMS

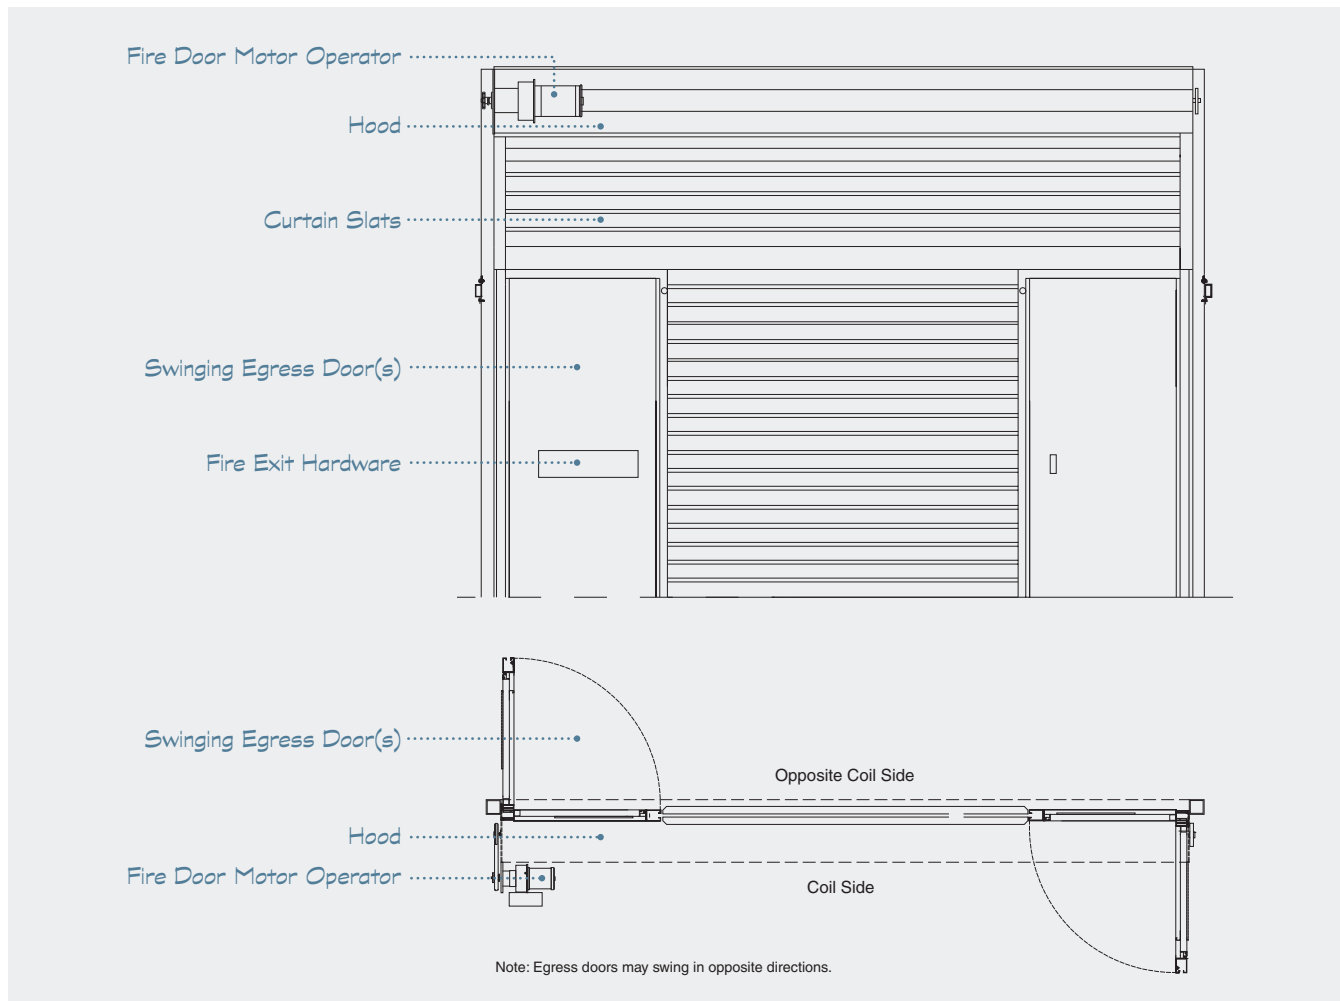

| MODEL | OPEN | SELF-CLOSE | EGRESS | FUNCTION |
|--------------|--------------------------|----------------------|--------------------------|--------------|
| T2000 | Auto-Set® Power Operator | Fail-Safe Mechanical | 1 Complying Swing Door* | Side Sliding |
| T2500 | Auto-Set® Power Operator | Fail-Safe Mechanical | 2 Complying Swing Doors* | Side Sliding |

*Maximum swing door width is 48"



44 Sawgrass Drive, Bellport, NY 11713 | 800.266.9392 | www.mckeondoor.com | info@mckeondoor.com

T2000