

AUTHORIZATION TO MARK

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report(s). This authorization also applies to the Multiple Listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The Certification Mark(s) may be applied only at the location of the Party Authorized to Apply Mark.

Applicant: McKeon Rolling Steel Door Company, Inc. dba McKeon Door Company
44 Sawgrass Drive
Bellport, NY 11713
United States

Contact: Andrew Lambridis

Phone: 631-803-3000

Fax: 631-803-3030

Email: lambridis@mckeondoors.com

Party Authorized to Apply Mark: See following page(s)


Evaluation Center: Intertek (Middleton)

Client Number: 203843

CONFIDENTIAL
PROPERTY OF McKEON

Authorized By: 
Jean-Philippe Kayl, Director of Certification

Intertek Testing Services NA, Inc.
545 E. Algonquin Road, Ste H., Arlington Heights, IL 60005 USA
Phone: 847-439-5667 Fax: 847-439-7320

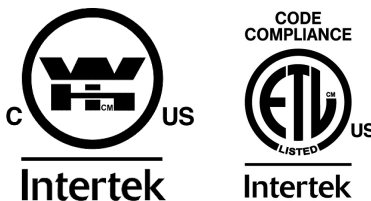

This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

Testing Standard(s):	NFPA 252 (2012), UL 1784 (2015), CAN / ULC S104 (2015), UL 10(b) (R2015)
Product:	McKeon Series S4000, S9000 and S7000 Side Coiling and Side Acting Steel Fire Door (Slats) with or without Integral Proprietary Swing Doors

ATM for Report: 14376-231, J99013592-231, 3064271, 3095113, G100904711, G101852247, G102273405, G102824676, G103933746

ATM Issue Date: 9/9/2019

Listing Section(s): DOORS - ROLLING STEEL
SMOKE CONTROL DOOR ASSEMBLIES

CSI Code(s): 08 11 00 Metal Doors and Frames
08 10 00 Doors and Frames
08 35 13.23 Accordion Folding Fire Doors

CONFIDENTIAL
PROPERTY OF McKEON

Description:

FIRE RESISTANT PRODUCTS & COMPONENTS

DOORS - ROLLING STEEL

Products Covered

- S4000, S9000 and S7000 models are non-insulated and only fire rated.
- S4000-IS, S9000-IS and S7000-IS models are insulated and fire rated but not temperature rise rated.
- S4000-TR, S9000-TR and S7000-TR models are insulated, temperature rise rated, and fire rated.

Product Description

Horizontally sliding, side coiling, side acting, vertical slat coil fire door assembly with or without integral swinging doors. Can be coil on one side or center parting. Steel stud drywall or masonry construction. May incorporate vision panels.

Alternate Bi-Parting Door Configuration: An alternate bi-parting door configuration consisting of a McKeon Series S4000, S9000 and S7000 Side Coiling and Side Acting Steel Fire Door and a McKeon Series AC8000 Accordion Fire Door is allowed. The McKeon Door Series with the most stringent restrictions and limitations, including size, will be applied for this alternate bi-parting door configuration.

Rating

Maximum 3 Hours

Models S4000-TR, S9000-TR and S7000-TR also qualify for the following temperature rise ratings:

- 450 degree Fahrenheit maximum temperature rise rating at 30 minutes when two units are installed back to back on both the inner and outer side of a masonry or drywall opening.
- 650 degree Fahrenheit maximum temperature rise rating at 30 minutes when used singly in a masonry or drywall opening.
- Please note, if an Integral Proprietary Swinging Door is used in conjunction with the McKeon Series S4000-TR, S9000-TR, or S7000-TR Side Coiling and Side Acting Steel Fire Doors, the integral swinging doors must also bear a temperature rise rating equal to or better than the respective temperature rise ratings noted above.

Models S4000, S9000, S7000 and AC8000 have an air leakage rate no greater than 3.0 CFM per square foot of door opening at 0.10 inch of water when tested in accordance with UL 1784. The door assemblies may be installed without a gasket or seal at the bottom of the assembly except where the assembly is installed where pressurization is provided to control smoke movement. The gap between the bottom of the assembly and the finished floor shall be a maximum of 3/8 in.,

based on the requirements for fire resistance applications.

SIZE LIMITATIONS

Certification Procedure	Maximum Area	Maximum Height	Maximum Width
LABEL	135 sq ft	10 ft	13.5 ft
CERIFICATE/LABEL	Unlimited*	Unlimited*	Unlimited*

*The AHJ may approve "oversize" doors with no size limitation based on an oversized certificate/label that states the door supplied is constructed in accordance with the certified design except for the size.

CODE COMPLIANCE RESEARCH REPORT

Evaluation Method	Building Code	CCRR Number
NFPA 252, UL 10B, UL 10C, CAN/ULC S104, and UL 1784	2018, 2015, and 2012 IBC 2018, 2015, and 2012 IFC 2017 FBC (Section 9) 2013 Abu Dhabi International Building Code (ADIBC)	CCRR-1086

CONFIDENTIAL
PROPERTY OF McKEON

Party(s) Authorized by Manufacturer To Apply Mark:

McKeon Rolling Steel Door Company, Inc. dba
McKeon Door Company
44 Sawgrass Drive
Bellport, NY 11713
United States
Contact: Andrew Lambridis
Phone: 631-803-3000
Fax: 631-803-3030
Email: lambridis@mckeondoor.com

Party(s) Authorized by Other Parties To Apply Mark:

None

CONFIDENTIAL
PROPERTY OF McKEON