

# McKEON



Creative Solutions . Innovative Designs . Proven Products

**Product Catalog** 


# Performance & Code Compliance

All McKEON rated assemblies carry Underwriter's Laboratory (UL), Intertek (ITS) or Factory Mutual (FM) listings for both fire and smoke, currently confirmed and published under an Intertek Code Compliance Research Report. Each fire door, fire shutter, and fire curtain product enters the market place labeled, and special application assemblies are pre-tested to the highest performance standards in the industry. Vertical, side and horizontal acting door, shutter, and curtain assemblies are tested and listed under current code referenced standards ensuring total acceptance and quality performance.

# **Educational Opportunities**

McKEON is a certified AIA and ICC Continuing Education Provider. We offer AIA CES learning units in Health Safety & Welfare to the architectural community and ICC CEUs for the code enforcement arena. Our textbook, "Fire Door Systems: A Guide to Code Compliance", is an interpretive manual on the current building code as it applies to fire resistance, opening protectives and egress.

VERTICAL ACTING FIRE DOOR SYSTEMS	FIRE & SMOKE RATED CURTAIN SYSTEMS
Vertical Coiling	Vertical Coiling
Curtain Shutter 2	Non-egress68
Deployable Egress6	Fixed Egress72
Fixed Egress12Non-egress18Counter Fire Shutters24	FEMA & WIND RATED DOOR SYSTEMS  Vertical Coiling  Storm Door
SIDE ACTING FIRE DOOR SYSTEMS	Storm Door with Added Features
Side Sliding	Operational Wind Load Rated84
Fixed Egress       28         Non-egress       28	BLAST, BALLISTIC & SECURITY DOOR SYSTEMS
Side CoilingFixed Egress32Non-egress36	Vertical Coiling Blast Resistant
Side Folding Accordion	·
Fixed Egress40	NON-FIRE RATED DOOR SYSTEMS
Power-assisted Egress40	Service & Security Doors100
Non-egress40	Security Grilles104
HORIZONTAL ACTING FIRE SHUTTER SYSTEMS	
Horizontal Shutter48	
SMOKE RATED CURTAIN SYSTEMS	
Vertical Coiling	
Deployable Draft Curtain 54	
Non-egress58	
Fixed Egress	
Perimeter Smoke Curtain64	

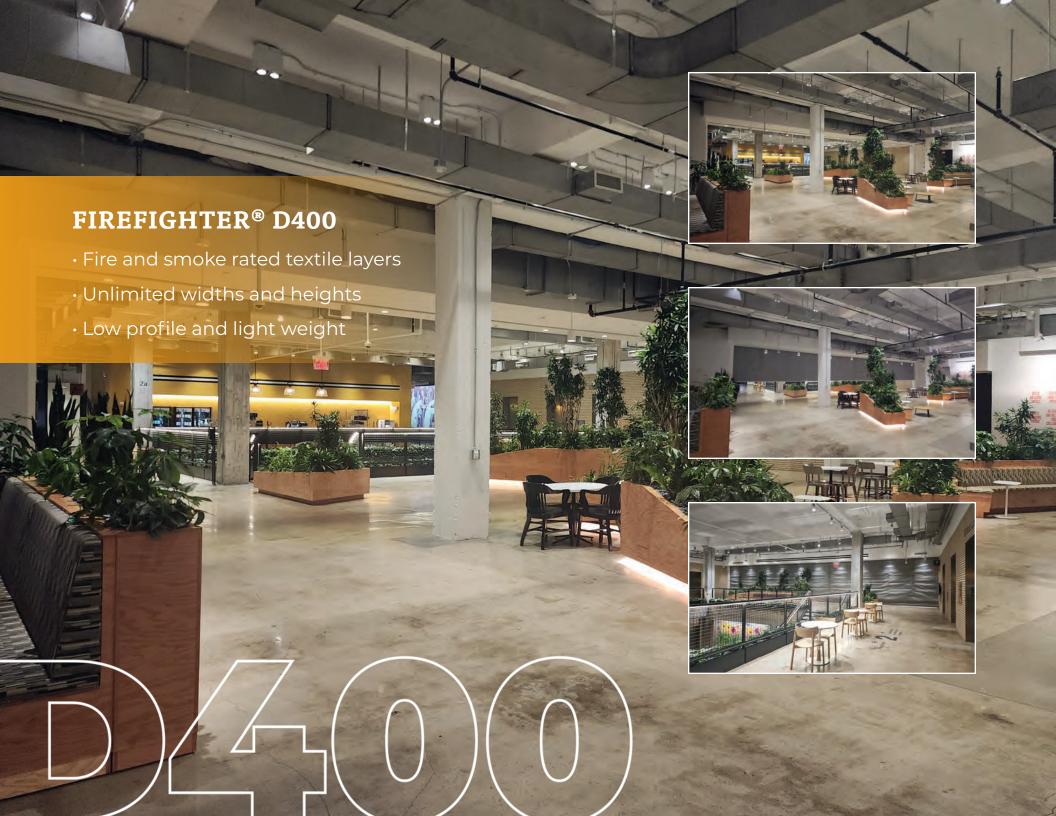

# **FireFighter®** Model D400

### Overhead Rolling Fire Curtain Shutter

The Model D400 is a one-of-a-kind rolling curtain shutter that has been tested and labeled to UL 10B for 90 minutes with hose stream and UL 1784 smoke & draft. Unparalleled in the market, it is designed to protect openings in any wall rated up to 2 hours - including Fire Walls and Fire Barrier Walls!

A simple but unique configuration of textile layers permanently joined together as one unit and stored on a barrel in the head box. When deployed, the D400 rolls down as if it were a rolling steel door! A substantial opening protective ready to withstand heat, fire, smoke and the ultimate integrity test – the hose stream.

### **Product Features**

90-minute rated UL 10B with hose stream\*

UL 1784 tested & listed without an artificial bottom seal

### **Code Compliance**

CCRR-1086

Auto-Set® automatic resetting

Fail-Safe Design – automatic self-closing mechanism does not require power or battery operation to self-close


Widths to 80' and heights to 48'; for larger sizes and custom configurations consult the factory

McKEON Sterling Gray


Powder coat of any color as selected

Stainless steel - No. 4 Polish or No. 8 Mirror

\*Listed under the Canadian equivalent CAN/ULC S104 This product has patents pending.

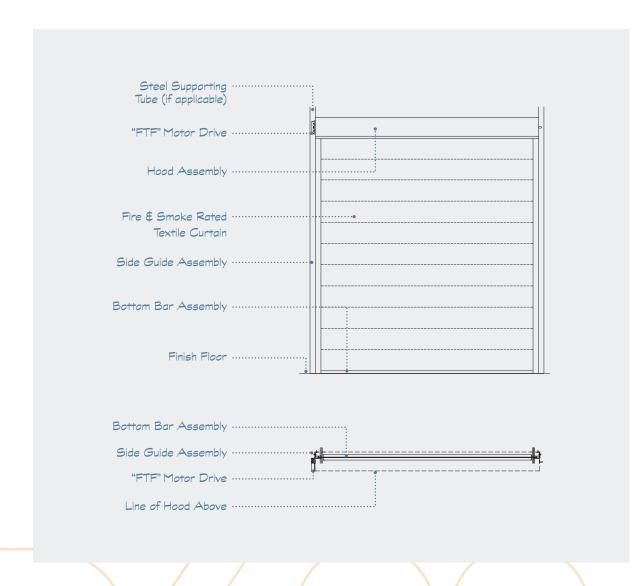

**FireFighter® Model D400** Design, handling and installation are much easiers due to significant reductions in profile size and weight when compared to conventional rolling steel fire doors.

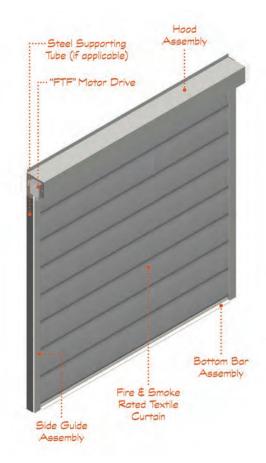





FireFighter® Model D400 | JP Morgan Chase Denver Market Station

MODEL	OPEN	SELF-CLOSE	EGRESS
D400	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A



# Safescape<sup>®</sup> T2000 Series

Overhead Coiling Fire Door with Deployable Egress

The Safescape® T2000 Series vertical coiling smoke and fire rated door system incorporates either one or two deployable complying swinging egress doors. Flush mounted in an adjacent wall, complying swinging egress doors deploy and lock into position at the command of an alarm condition. Once in place the integral egress doors and frames serve as side guides to accommodate a 3-hour roll-down door assembly that descends at a governed rate of speed. Within seconds a 3-hour opening protective with single or dual swinging egress doors stands ready to fight fire and smoke.

### **Product Features**

3-hour rated UL 10B\*

90-minute rated assembly available with a 650° F over 30 minutes Temperature Rise rating when required

UL 1784 tested & listed without an artificial bottom seal

### **Code Compliance**

CCRR-1086

ADA compliant

Available with up to 2 complying swinging egress doors

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close


Widths to 60' and heights to 48'; for larger sizes and custom configurations consult the factory

McKEON Sterling Gray

Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

<sup>\*</sup>Listed under the Canadian equivalent CAN/ULC S104 This technology is the subject of US Patent Nos. 7,490,654 and 8,453,707.

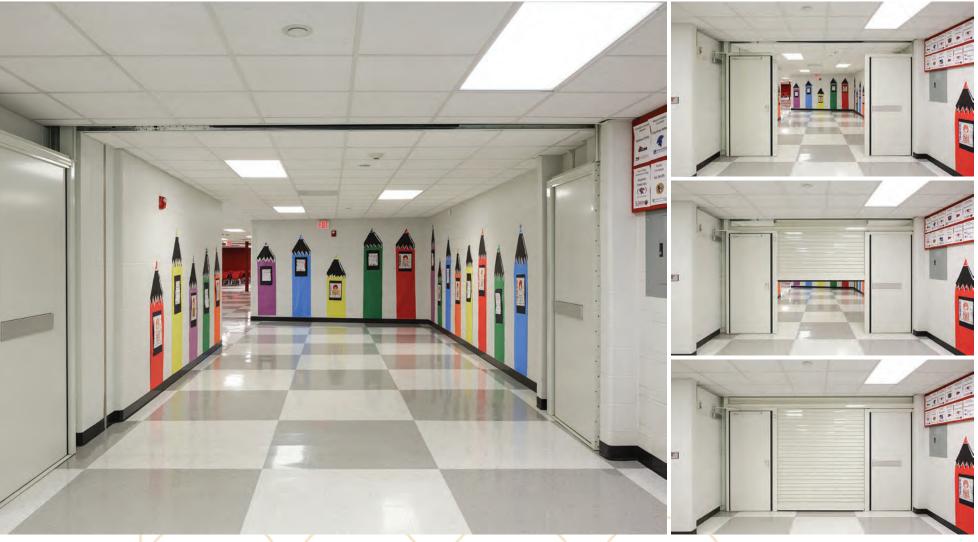

Safescape® Model T2500 | Hazelwood West Middle School









Safescape® Model T2500 | Marco Island Marriott



Safescape® Model T2000 | University of Nevada Las Vegas

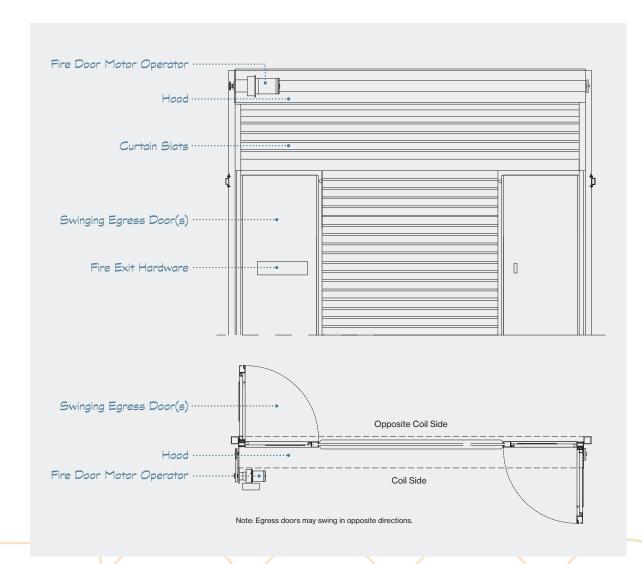

Safescape® Model T2500 The rolling steel portion of this assembly can accommodate large width and unlimited height openings. The integrated door frames are flush mounted in the adjoining walls with the deployable swing doors in the open position. Together these components comprise a coordinated opening protective guaranteed to close in case of fire, yet provide required egress.

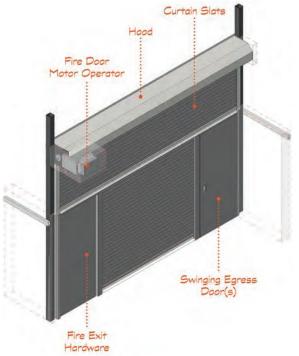








Safescape® Model T2500 | Northwood Middle School

MODEL	OPEN	SELF-CLOSE	EGRESS
T2000	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door*
T2500	Auto-Set® Power Operator	Fail-Safe Mechanical	2 Complying Swing Doors*

<sup>\*</sup>Maximum swing door width is 48".

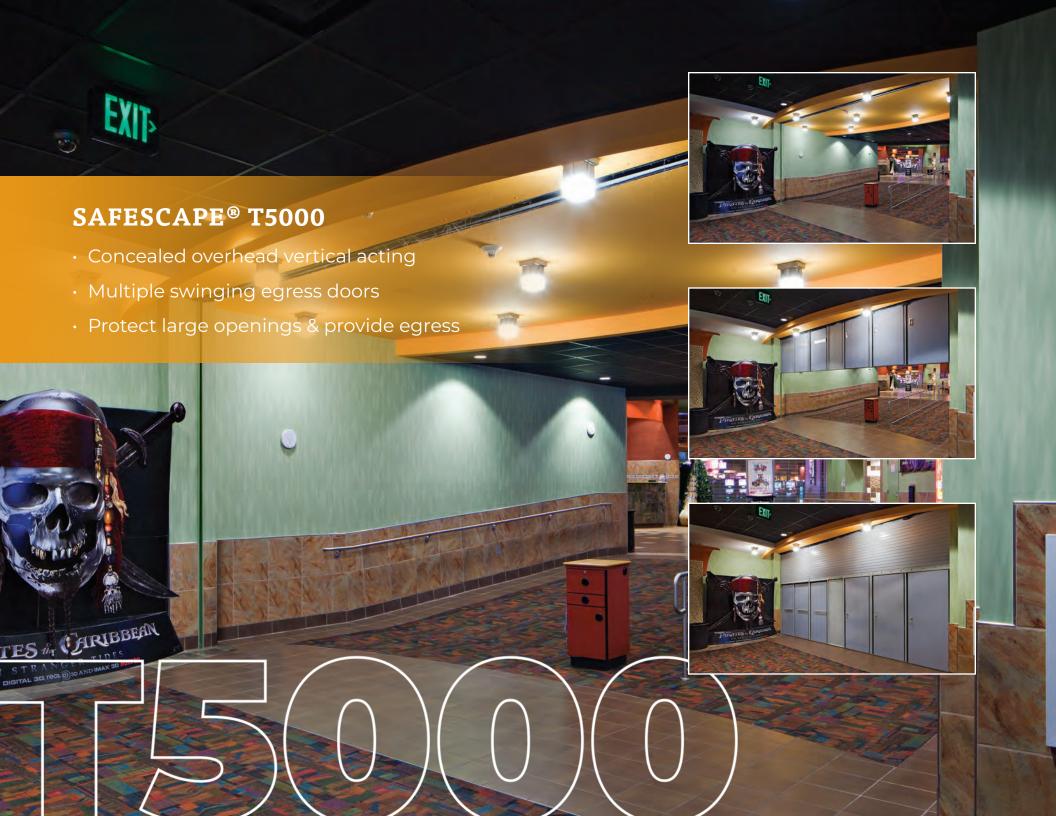

# Safescape<sup>®</sup> T5000 Series

Overhead Acting Fire Door with Fixed Egress

Safescape® T5000 Series smoke and fire rated door assemblies are designed to coil at the top allowing the rigid bottom frame with fixed swinging egress doors to lower when deployed. Once in place, the single or multiple swinging egress doors provide complying egress. Large occupant loads and wide-span openings are easily accommodated by the McKEON T5000.

### **Product Features**

3-hour rated UL 10B\*

90-minute rated assembly available with a 650° F over 30 minutes Temperature Rise rating when required

UL 1784 tested & listed without an artificial bottom seal

### **Code Compliance**

CCRR-1086

ADA compliant

Available with up to 18 complying swinging egress doors

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Widths to 80' and heights to 40'; for larger sizes and custom configurations consult the factory

McKEON Sterling Gray

Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

\*Listed under the Canadian equivalent CAN/ULC S104 This technology is the subject of US Patent No. 8,453,707.











Safescape® Model T5007 | Planet Hollywood Resort & Casino


Safescape® Model T5001 | UMC of Southern Nevada

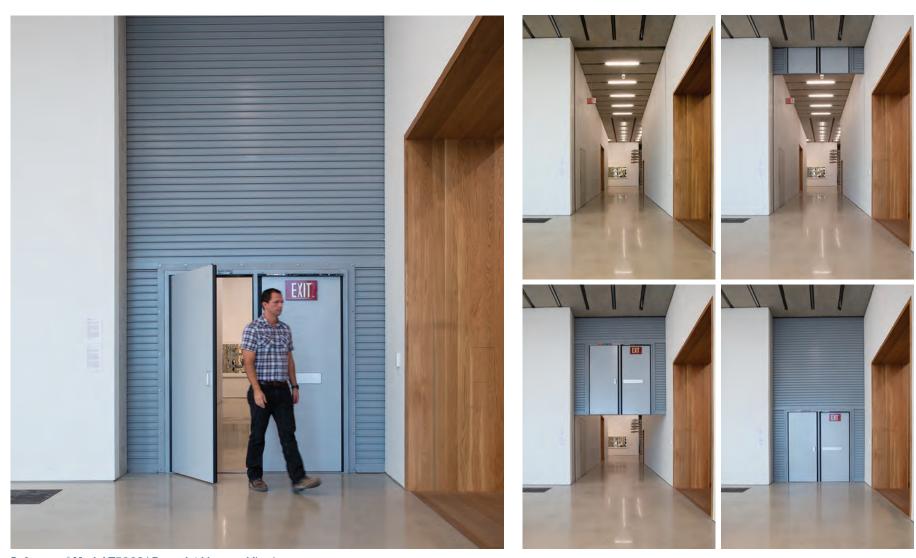


Safescape® Model T5002 | Perez Art Museum Miami

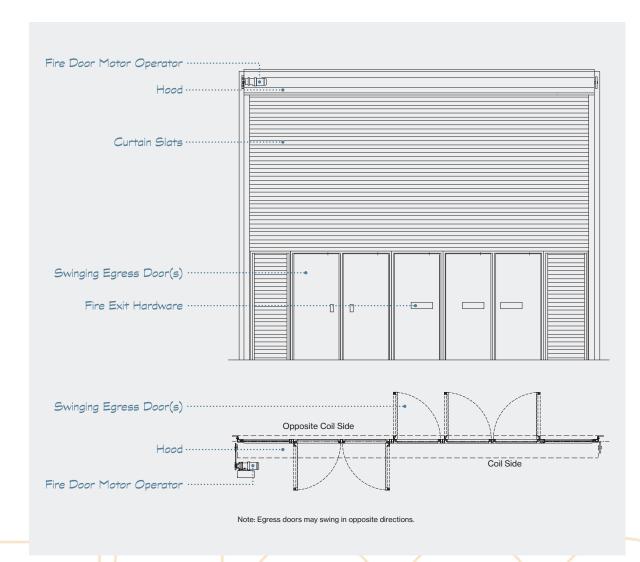

**Safescape® Model T5005** Often the design parameters do not allow space for side sliding or siding coiling storage pockets. Ideal when there is sufficient head-room above the opening, this door system requires only a simple side-guide mounted on each side of the opening. This technology features multiple conventional egress doors to accommodate large occupant loads.

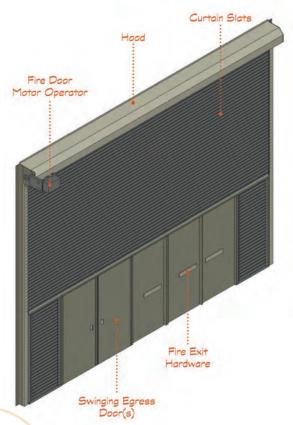

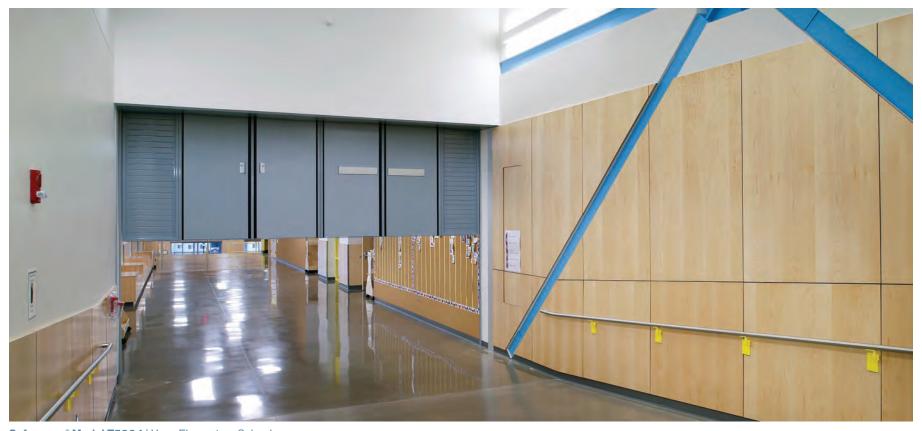

Safescape® Model T5004 | Vose Elementary School

MODEL OPEN		SELF-CLOSE	EGRESS	
T5001	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door <sup>2</sup>	
T5002-T50181	Auto-Set® Power Operator	Fail-Safe Mechanical	2 to 18 Complying Swing Doors <sup>2</sup>	

<sup>&</sup>lt;sup>1</sup> The last two digits of the model number indicate the number of swing doors.

<sup>&</sup>lt;sup>2</sup>Maximum swing door width is 48".



# Auto-Set® **FSFD** Series

Overhead Coiling Fire Door without Egress

McKEON Auto-Set® FSFD Series are recommended in situations where fire and smoke protection is required but building occupant egress is not an issue. The vertically acting fire door is UL, Intertek and Factory Mutual classified for up to four hours in both masonry and drywall applications.

### Also available:

- Auto-Set® Model FSFD-STC with an acoustical rating of up to 34 STC
- Auto-Set® Model FSFD-IS with climate control insulation
- Auto-Set® Model FSFD-TR with a temperature rise rating when required

### **Product Features**

FSFD Up to 4-hour rated UL 10B\*

UL 1784 tested & listed without an artificial bottom seal

**FSFD-TR Rated** (Temperature Rise)

Single assembly, 90-minute fire rating, available with a temperature rise rating of 650°F over 30 minutes when required

Double assembly positioned back-to-back, 4-hour fire rating, available with a temperature rise rating of 450°F over 30 minutes when required

**FSFD-IS** Thermal protection with an R value up to 9.3

FSFD-STC Available with an STC up to 34

CCRR-1086

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Based upon door size, available with hand-chain or handcrank operation

Widths to 80' and heights to 48'; for larger sizes and custom configurations consult the factory

McKEON Sterling Gray

Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

\*Listed under the Canadian equivalent CAN/ULC S104 This technology is the subject of US Patent No. 8,453,707.








Auto-Set® Model FSFD | Piedmont High School






Auto-Set® Model FSFD-STC | Liberty High School

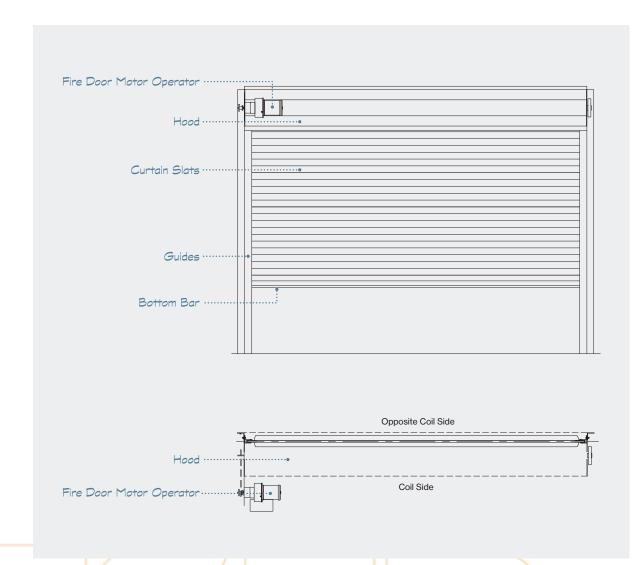

**Auto-Set® Model FSFD** This overhead coiling door appears to have standard industry features and functions but it is much more. With the AutoSet® operator and constructed of robust and unique operating components, it leads the industry in functionality and dependability. In addition to a fire rating the FSFD can be both sound and temperature rise rated.

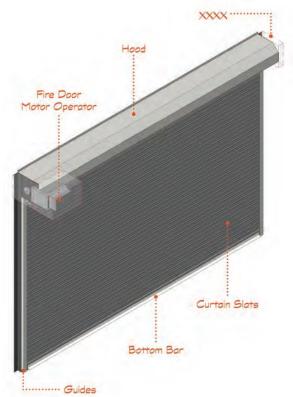





Auto-Set® Model FSFD-TR | Providence Public Library

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
FSFD	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Fire Door
FSFD-IS	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Insulated Fire Door
FSFD-STC	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Sound Rated Fire Door
FSFD-TR	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Temperature Rise Rated Fire Door



# Auto-Set® **CFS Series**

### Counter Fire Shutter

The automatic resetting Auto-Set® CFS Fire and Smoke Rated counter shutters can be designed to accommodate almost any opening variation up to 30 feet in width and 12 feet in height for both interior and exterior applications. Unlike conventional counter fire shutters the Auto-Set® CFS Series are easily tested and reset by on site building personnel. For a finished appearance when the housing is exposed McKEON offers a tubular concealed inboard motor option.

### **Product Features**

Up to 3-hour rated UL 10B\*

UL 1784 tested & listed without an artificial bottom seal

### **Code Compliance**

CCRR-1086

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Available with a concealed inboard fire shutter motor operator


Widths to 30' and heights to 12'; for larger sizes and custom configurations consult the factory

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

<sup>\*</sup>Listed under the Canadian equivalent CAN/ULC S104

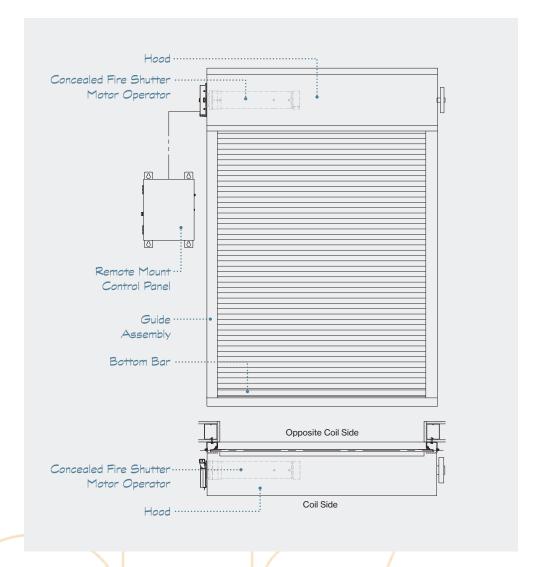

### Auto-Set® Model CFS-FT | Counter Fire Shutter with Concealed Inboard Motor

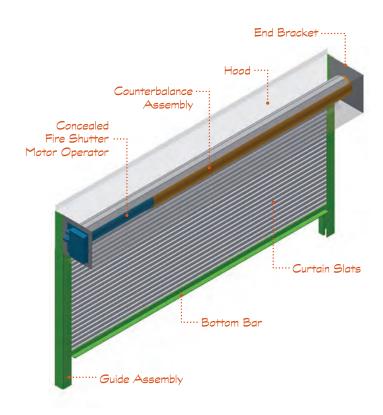

**Auto-Set® Model CFS** fire shutters can be designed to accommodate almost any opening variation. For a finished appearance when the housing is exposed McKEON offers a tubular concealed inboard motor option.





Auto-Set® Model CFS | Sharon Steel School

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
CFS-FT	Auto-Set® Concealed Power Operator	Fail-Safe Mechanical	N/A	Concealed Inboard Motor Operated Fire Shutter
CFS-M	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Motor Operated Fire Shutter
CFS-HK	Hand-crank	Fail-Safe Mechanical	N/A	Hand-Crank Operated Fire Shutter
CFS-PP	Manual Push-up	Mechanical	N/A	Manually Operated Fire Shutter



# **\$7000** Series

Side Sliding Fire Door with or without Egress

S7000 Series fire door systems are available in both manual or motor operated designs and with or without swinging egress doors. S7000 Series doors are side acting therefore ideal for openings in fire walls where headroom is limited. The side activated design enables these fire doors to navigate around tight curves and contoured openings.

### **Safescape® Bi-parting Model S7700** UNL Love North Learning Commons

### **Product Features**

3-hour rated UL 10B\*

Available with a temperature rise rating of 650°F over 30 minutes when required, single parting only

UL 1784 tested & listed without an artificial bottom seal

CCRR-1086

ADA compliant

Available with multiple fixed complying swinging egress doors when required

Auto-Set® automatic resetting for motor operated

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close


Manual operation option available for assemblies up to 10'x10'

Widths to 80' (160' bi-parting) and heights to 24'; for larger sizes and custom configurations consult the factory


Negotiates radius curves: 3'-0" with egress doors; 1'-6" without egress doors

McKEON Sterling Gray Powder Coat of any color as selected Stainless Steel - No. 4 Polish or No. 8 Mirror

<sup>\*</sup>Listed under the Canadian equivalent CAN/ULC S104 This technology is the subject of US Patent Nos. 8,307,877 and 9,267,326.

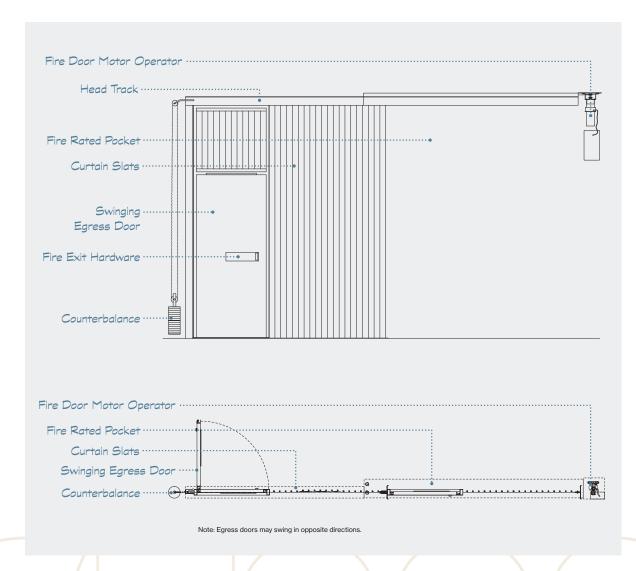

**Safescape® Model S7700** This unit does not stack, coil or compress within a storage pocket. The depth of the storage area must be equal to at least the width of the opening that the assembly protects. The advantage of this technology is that the profile of the pocket can be as narrow as 4 1/2".

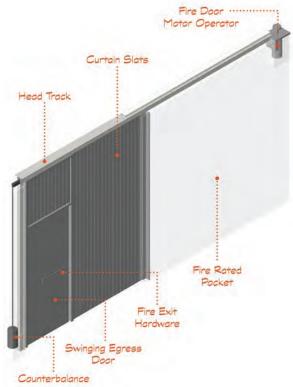





Safescape® Model S7904 | Aliante Casino + Hotel

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
\$7200	Manual Push-open	Fail-Safe Mechanical	N/A	Side Sliding
\$7400	Manual Push-open	Fail-Safe Mechanical	1 Complying Swing Door*	Side Sliding
\$7500	Manual Push-open	Fail-Safe Mechanical	2 Complying Swing Doors*	Side Sliding
\$7600	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Side Sliding
\$7700	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door*	Side Sliding
\$7900	Auto-Set® Power Operator	Fail-Safe Mechanical	Multiple Complying Swing Doors	Side Sliding

<sup>\*</sup>Maximum swing door width is 48".



# Safescape<sup>®</sup> S9000 Series

Side Coiling Fire Door with Fixed Egress

The Safescape® S9000 Series fire door systems are side coiling smoke and fire rated assemblies with one or multiple integral swinging egress doors, a complying method of egress. The side coiling design makes these products ideal for openings in rated walls where headroom clearance is limited. The assemblies can easily navigate around tight curves and contoured openings.

### **Product Features**

3-hour rated UL 10B\*

Available with a temperature rise rating of 650°F over 30 minutes when required, single parting only

UL 1784 tested & listed without an artificial bottom seal

CCRR-1086

ADA compliant

One or multiple complying integral swinging egress doors. when required

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Widths to 80' (160' bi-parting) and heights to 24'; for larger sizes and custom configurations consult the factory Negotiates radius curves: 3'-0" with egress doors;


1'-6" without egress

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror


<sup>\*</sup>Listed under the Canadian equivalent CAN/ULC S104 This technology is the subject of US Patent Nos. 8,307,877 and 9,267, 326.

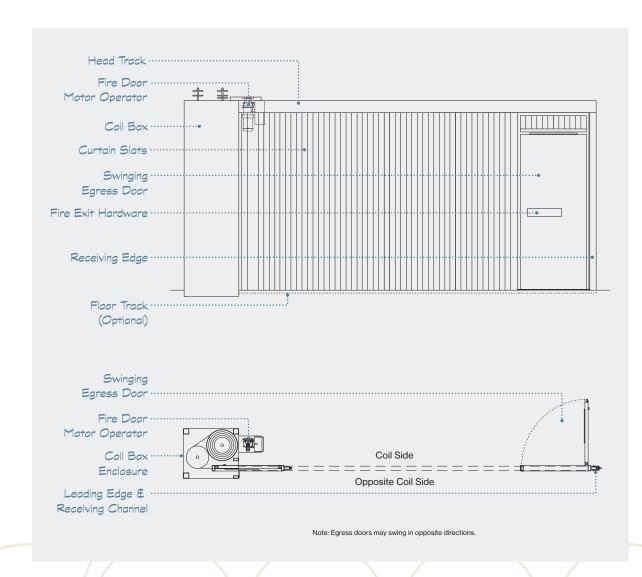


Safescape® Model S9000 This wide-span opening can span extreme widths when deployed. When stored, it coils into a uniquely tight configuration requiring very little pocket space. Heights and widths are unlimited. The S9000 can accommodate one or multiple conventional swing doors positioned at the leading edge.

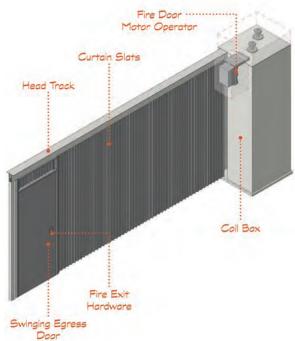

# |||||||||| Side Acting Fire Door Systems

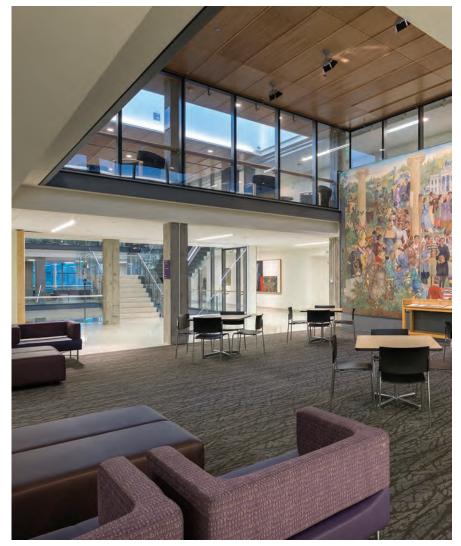

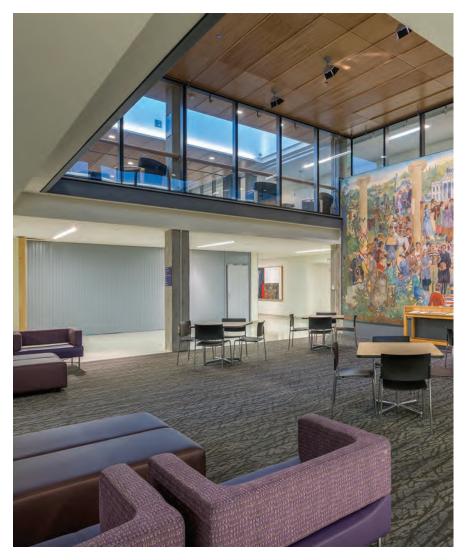

Safescape® Model S9000 | University of Washington



### ||||||||| Side Acting Fire Door Systems

# Auto-Set® Model S4000

Side Coiling Fire Door without Egress

The automatic resetting Model S4000 is a side coiling smoke and fire rated door. The S4000's side activated design makes this product ideal for openings in rated walls where headroom is limited. The assembly can easily navigate around tight curves and contoured openings.

### **Product Features**

3-hour rated UL 10B\*

Available with a temperature rise rating of 650°F over 30 minutes when required, single parting only

UL 1784 tested & listed without an artificial bottom seal

CCRR-1086

ADA compliant

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Widths to 80' (160' bi-parting) and heights to 24'; for larger sizes and custom configurations consult the factory

Negotiates 1'-6" radius curves


McKEON Sterling Gray

Powder Coat of any color as selected


Stainless Steel - No. 4 Polish or No. 8 Mirror

<sup>\*</sup>Listed under the Canadian equivalent CAN/ULC S104 This technology is the subject of US Patent Nos. 8,307,877 and 9,267,326.

## ||||||||| Side Acting Fire Door Systems

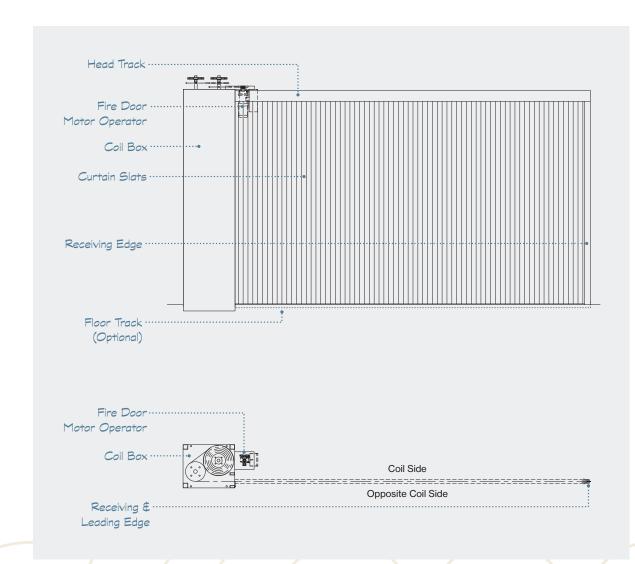

Auto-Set® Model S4000 A wide-span opening that can span extreme widths or heights when deployed. When stored, it coils into a uniquely tight configuration and requires very little pocket space. Heights and widths are unlimited. Because of the single track and slat configuration this door has the capability to turn a radius as tight as 18".

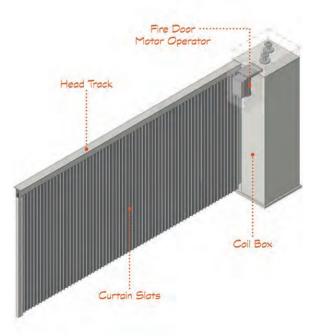

# |||||||||| Side Acting Fire Door Systems



Auto-Set® Model S4000 | NC University State, Hunt Library

Auto-Set® Model S4000 | Bowie State University

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
\$9000	Auto-Set® Power Operator	Fail-Safe Mechanical	One Complying Swing Door	Side Coiling
\$9500	Auto-Set® Power Operator	Fail-Safe Mechanical	One or Multiple Complying Swing Doors	Side Coiling
\$4000	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Side Coiling



### IIIIIIII Side Acting Fire Door Systems

# AC8000 Series

Accordion Side Folding Fire Door with or without Egress

The AC8000 Series fire door systems are available in either manual or motor operated designs and can be provided with or without swinging egress doors. The units are made up of either 7-inch or 14-inch panels requiring a 9-inch or a 15 1/2-inch pocket profile, respectively.

### **Product Features**

3-hour rated UL 10B\*

UL 1784 tested & listed without an artificial bottom seal

### **Code Compliance**

CCRR-1086

ADA compliant

Available with fixed complying swinging egress doors Power assisted exit device (AC8800 only)

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

AC8800 is DC power operated with integrated backup system

Manual operation option available for assemblies up to 10'x10'

Widths to 80' (160' bi-parting) and heights to 24'; for larger sizes and custom configurations consult the factory

Negotiate radius curves: 2'-0" without egress door; 3'-0" with egress door

McKEON Sterling Gray Powder Coat any color as selected Stainless Steel - No. 4 Polish or No. 8 Mirror

\*Listed under the Canadian equivalent CAN/ULC S104 This technology is the subject of US Patent No. 8,307,877.

## ||||||||| Side Acting Fire Door Systems





Safescape® Model AC8400 | UMC of Southern Nevada




Safescape® Model AC8800 | Planet Hollywood Resort &


# |||||||||| Side Acting Fire Door Systems



Model AC8707 | ThedaCare Orthopedics, Spine and Pain


# |||||||||| Side Acting Fire Door Systems

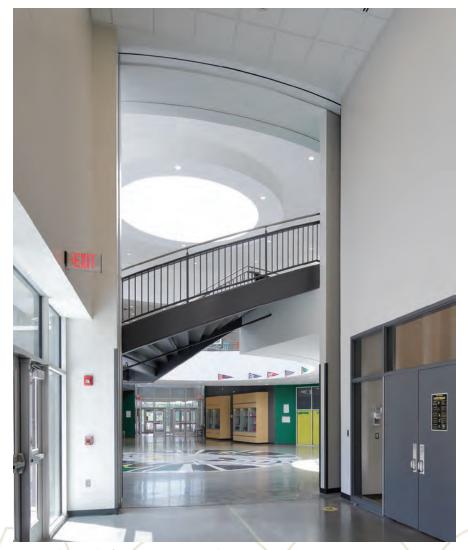

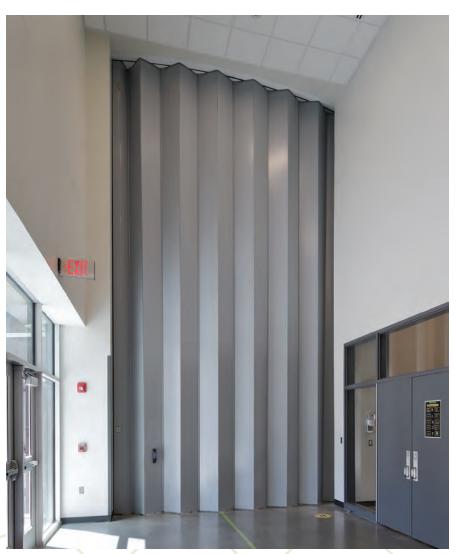

Model AC8800CP | Wilbur D. Mills High School


# ||||||||||| Side Acting Fire Door Systems

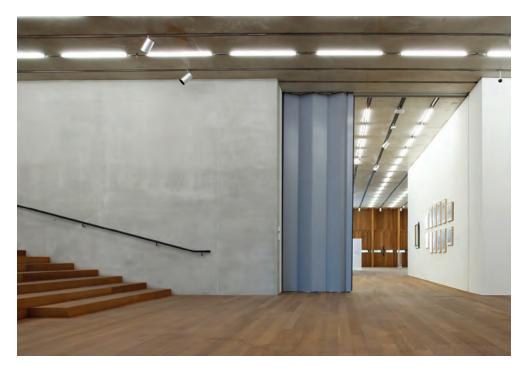






Model AC8600 | Perez Art Museum

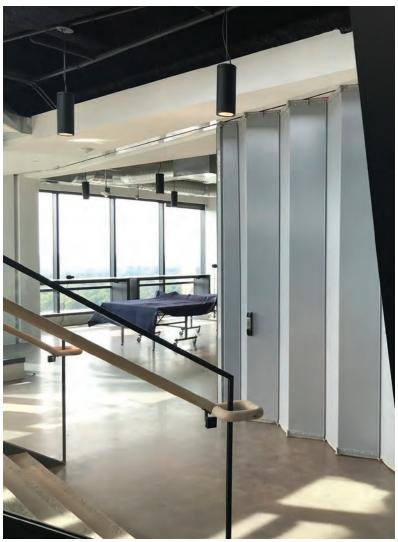


Model AC8814CP | Lowes Tech Hub

### ||||||||| Side Acting Fire Door Systems

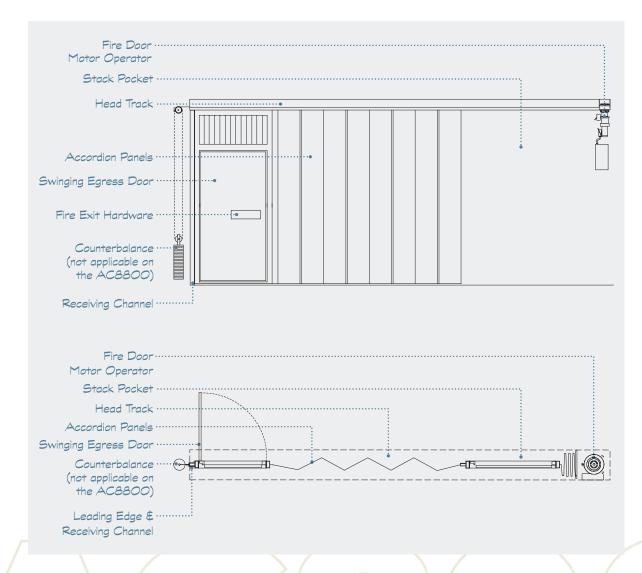

**Auto-Set® Model AC8714** Featured below is only one of seven different models of the accordion fire door systems by McKEON. The assemblies can be operated to open and close manually or motor driven. Egress options include conventional swing door egress, push-paddle power assisted egress or no egress.

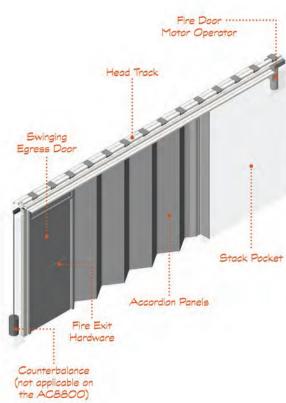

# |||||||||| Side Acting Fire Door Systems





Model AC8800CP | Wilbur D. Mills High School

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
AC8200	Manual Push-open	Fail-Safe Mechanical	N/A	Accordion Sliding
AC8400	Manual Push-open	Fail-Safe Mechanical	1 Complying Swing Door	Accordion Sliding
AC8500	Manual Push-open	Fail-Safe Mechanical	2 Complying Swing Doors	Accordion Sliding
AC8600	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Accordion Sliding
AC8700	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door	Accordion Sliding
AC8800	Auto-Set® Power Operator	Fail-Safe Power Operated	Power Assisted (Complying Dual Egress)	Accordion Sliding
AC8900	Auto-Set® Power Operator	Fail-Safe Mechanical	Multiple Complying Swing Doors	Accordion Sliding

<sup>\*</sup>The motor drive unit for the AC8800CP is located above the header allowing for a more compact pocket depth.



# Auto-Set® H200 Series

### Horizontal Fire Shutter

The automatic closing H200 Series horizontal fire shutters prevent the migration of heat, smoke or hot/toxic gases by creating vertical compartments thereby separating the vertical spaces from one another. Horizontal fire shutters reduce construction costs. Smoke evacuation systems can become unnecessary and one horizontal fire shutter can be used in lieu of numerous conventional fire barriers on multiple floors.

### **Product Features**

### Ratings

2-hour rated UL 10B\* Smoke & Draft labeled UL 1784

### **Code Compliance**

CCRR-1086

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Widths to 30' and lengths to 90' (180' bi-parting); for larger sizes and custom configurations consult the factory

### **Finishes**

McKEON Sterling Gray


Powder Coat of any color as selected


Stainless Steel - No. 4 Polish or No. 8 Mirror

<sup>\*</sup>Listed under the Canadian equivalent CAN/ULC S104 This technology is the subject of US Patent No. 9,267,326.




Auto-Set® Model HL250 | Minnie Howard Campus of Alexandria City High School

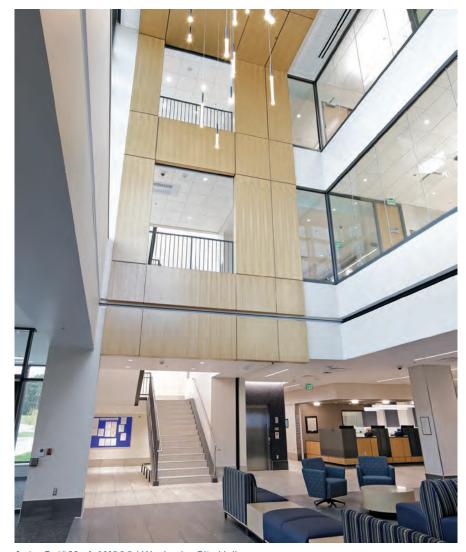

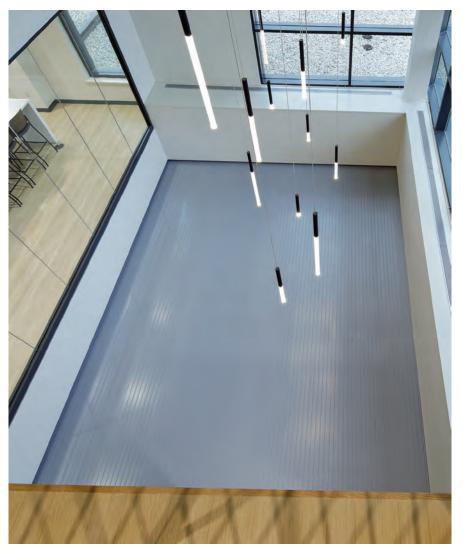



Auto-Set® Model H200 | Waukesha City Hall

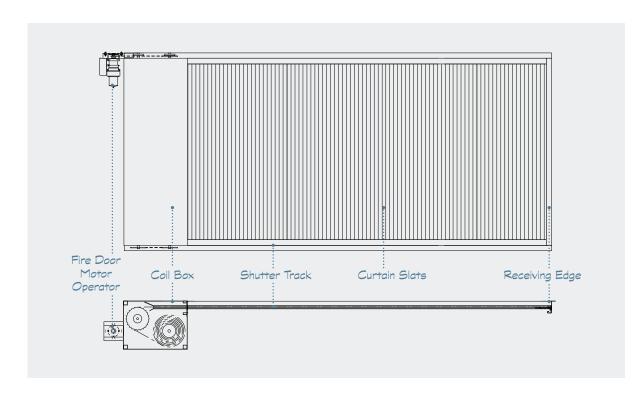

**Auto-Set® Model H200** Unique and proprietary to McKEON, the horizontally operated smoke and fire shutter will mitigate the transfer of heat and toxic fumes, and close automatically. Because it can bear a significant load, falling debris during a fire event is no challenge for the H200.



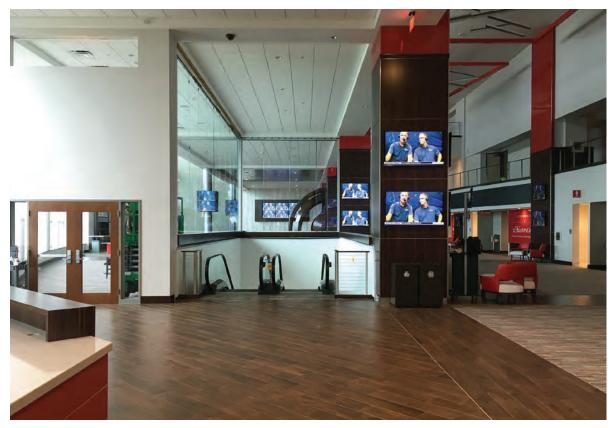

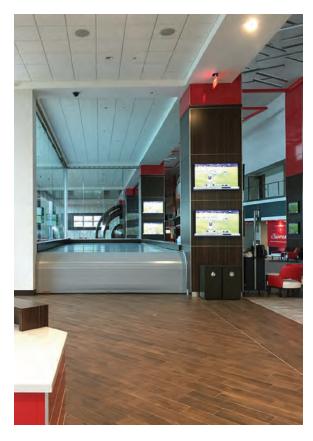

Auto-Set® Model HL250 | Raymond James Stadium

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
H200	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Coiling on the Horizontal Plane
HL250 (Curved)	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Coiling on the Horizontal and Vertical Plane



# **SmokeFighter®** Model D100

### Deployable Draft Curtain

The McKEON SmokeFighter® Model D100 is manufactured from protective curtain assembly material that has been tested and certified under UL 10B, 10C, 10D and UL 1784; and approved to span unlimited widths and heights up to 24 feet. The test criteria included side guides, however, the test parameters for draft curtains do not require any of the above certifications except to resist the passage of smoke. Thus, the McKEON Model D100 exceeds the fire and life safety requirements for draft curtains in the building code.

### **Product Features**

Approved materials in compliance with draft curtain requirements

**Code Compliance** 

NFPA 13 compliant

Not required

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close


Unlimited widths and heights to 48'

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

This technology is the subject of US Patent No. 10,145,174 and has additional patents

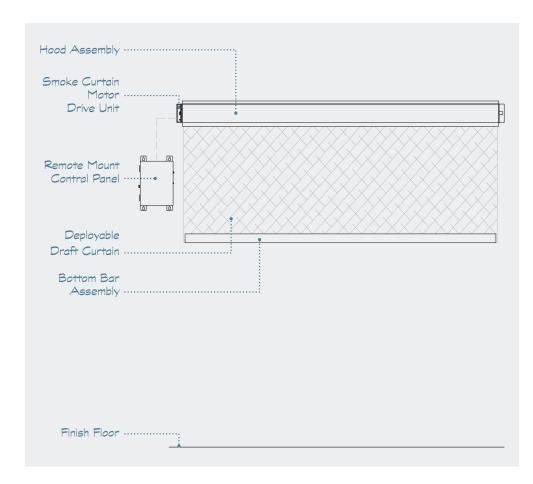


**SmokeFighter® Model D100** Although side guides are absent, this smoke curtain is rated equal to our standard smoke and fire rated fabric. The D100 offers all the benefits of an NFPA 13 complying draft curtain when the building goes into fire alarm mode.

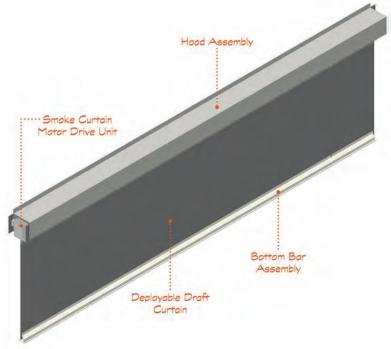







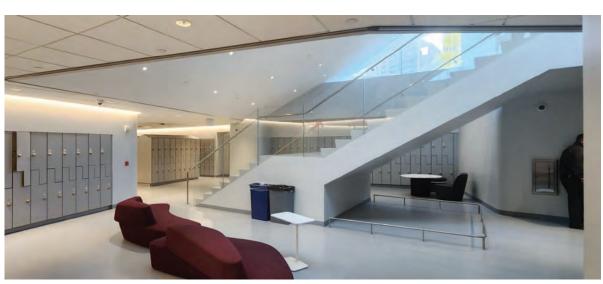



SmokeFighter® D100 | University NYC



# **SmokeFighter®** Model D150

Overhead Smoke Curtain without Egress

This technology provides a compliant solution where the model building codes prescribe smokeonly separation and egress is not required. The assembly is fixed in place with side guides and bottom bars so smoke is handily contained when the building goes into an alarm condition.

### **Product Features**

UL 1784 tested & listed without an artificial bottom seal

### **Code Compliance**

### CCRR-0455

Vision panel optional when required

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power to self-close


Unlimited widths and heights to 48'

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

This technology is the subject of US Patent No. 10,145,174 and has additional patents pending.

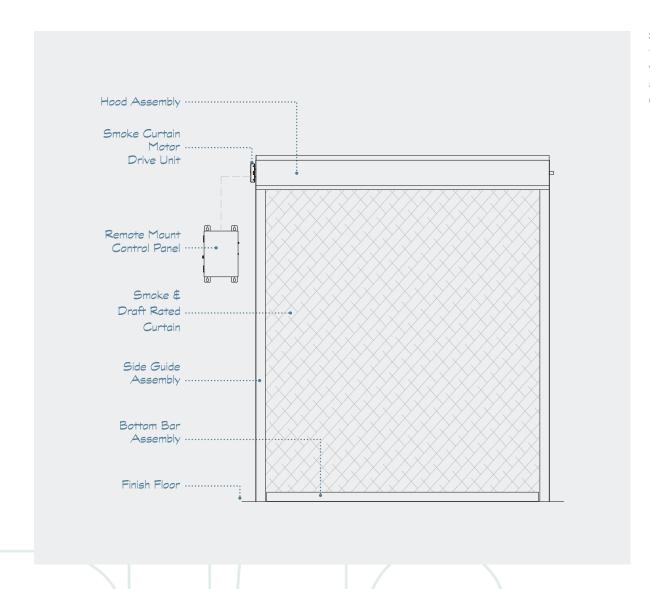

**SmokeFighter® Model D150** This smoke rated fabric technology employs the same type of operating system we use on our steel shutter systems. Fixed side guides and a bottom bar hold the curtain in place. Guaranteed to operate smoothly and efficiently every time.

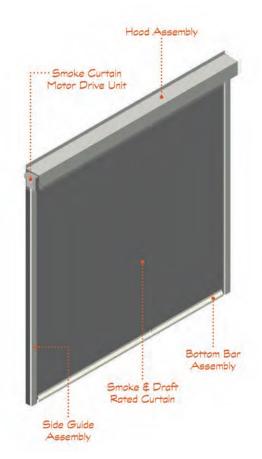

# **SmokeFighter®** Model D150E

Overhead Smoke Curtain with Egress

McKEON offers a smoke and draft listed curtain assembly at the point of access to an elevator car with a patented egress feature that complies with the exiting requirements of the building codes. The Model D150E incorporates a vision panel (smoke rated assemblies only) and has been tested without an artificial bottom seal.

### **Product Features**

UL 1784 tested & listed without an artificial bottom seal

### **Code Compliance**

### CCRR-0455

ASME A17.1 compliant vision panel when required ADA compliant threshold

Available with up to 8 complying egress doors

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power to self-close


Widths to 60' and heights to 48'; for larger sizes and custom configurations consult the factory

McKEON Sterling Gray

Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

This technology is the subject of US Patent Nos. 9,440,100; 10,145,174; 10,569,112; and 10.864.394; and has additional patents pending.

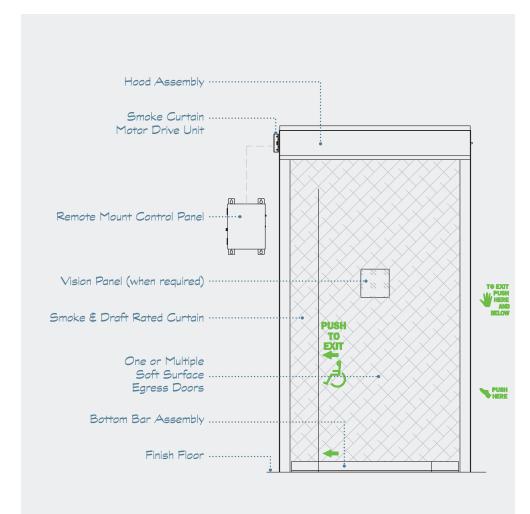





SmokeFighter Model D150E is available with an ASME A17.1 compliant vision panel when required.







SmokeFighter® D150E | Nike The Grove









# SmokeFighter Model D500S

Perimeter Smoke Curtain

McKEON has added an advanced technology to its tested and proven SmokeFighter Series ... vertical acting smoke protective curtains that form floor-to-ceiling enclosures without mullions or corner posts!

Unique configurations are no challenge. This UL1784 labeled smoke curtain technology creates its own corners and jambs, vertically acting without any cumbersome features. Its corner profile is unmatched in the industry! The system installs with ease, operates smoothly and simply, and conceals beautifully in the finished ceiling.

The Model D500S can reduce the volume of smoke in an atrium, protect a corridor, or mitigate smoke migration. Best of all, the technology provides required smoke separation without impact to the desired spacious appearance in any design.

### **Product Features**

UL 1784 tested & listed without an artificial bottom seal

Code Compliance

CCRR-0455

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close


Widths up to 300' and heights up to 48'

McKEON Sterling Gray


Powder Coat of any color as selected


Stainless Steel - No. 4 Polish or No. 8 Mirror

This technology has patents pending.

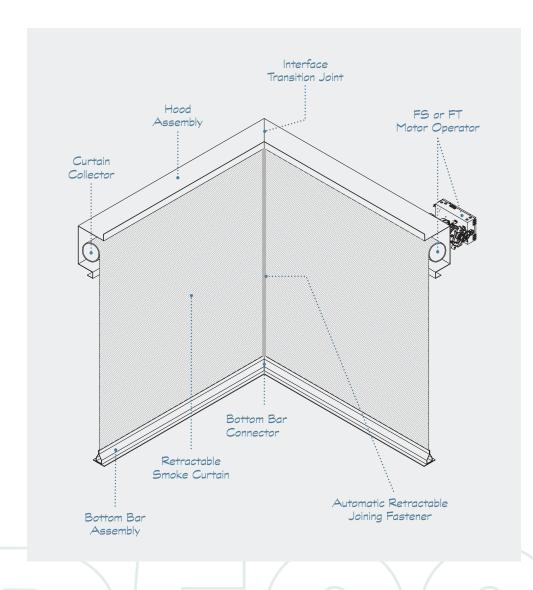

**SmokeFighter® Model D500S** The absence of fixed corner posts allows for random corner configurations that are not limited to 90 degree angles. Regardless of the quantity of retractible panels, when connecting them together, varying degrees of angle-corner connections can be accommodated. Open plan design is not subject restrictive or limited by product configuration.

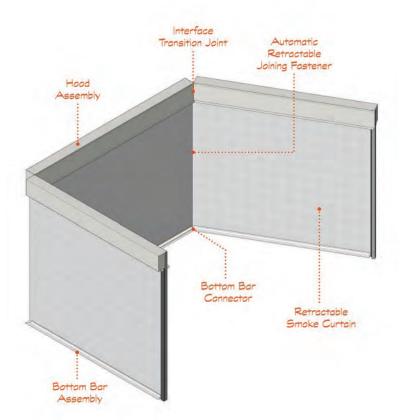

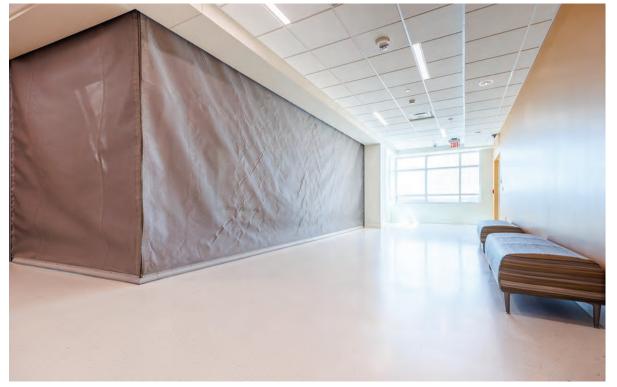





SmokeFighter® D500S | Rapid City Health Center

MODEL	OPEN	SELF-CLOSE	EGRESS
D100	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A
D150	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A
D150E	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door
D152E - D158E*	Auto-Set® Power Operator	Fail-Safe Mechanical	2 to 8 Complying Swing Doors
D500S	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A

<sup>\*</sup>The last digit of the model number indicates the number of swing doors.



### Fire & Smoke Rated Curtain Systems

# **FireFighter®** Model D200

Overhead Fire Curtain without Egress

The Model D200 is an opening protective made of a flexible fire-rated fabric that is US laboratory tested and approved for unlimited widths. A first in the industry, the D200 carries a UL 10B and UL 10C rating for 20 minutes, UL 10D for up to 3 hours, and UL 1784 for smoke and draft. FireFighter Model D200 is approved for use in multiple applications.

### **Product Features**

20-minute rated UL 10B & 10C without hose stream

Up to 3-hour rated UL 10D

UL 1784 tested and listed without an artificial bottom seal

### **Code Compliance**

### CCRR-0455

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Unlimited widths and heights to 48'


McKEON Sterling Gray

Powder Coat of any color as selected


Stainless Steel - No. 4 Polish or No. 8 Mirror

This technology is the subject of US Patent No. 10,145,174 and has additional patents pending.


## Fire & Smoke Rated Curtain Systems

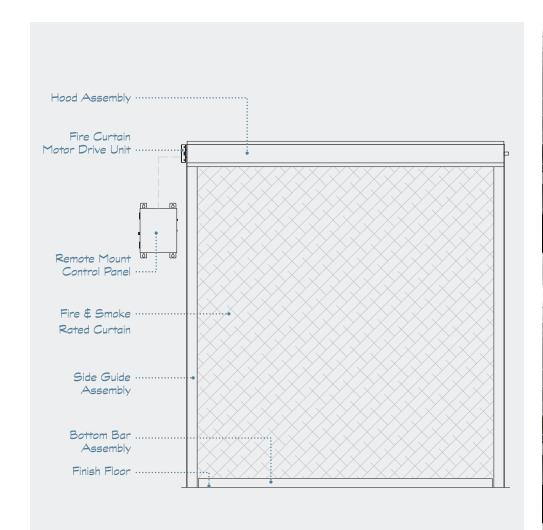




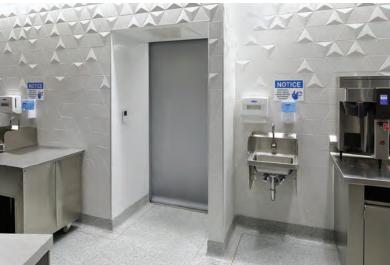

FireFighter® D200 | ThedaCare Orthopedics, Spine and Pain

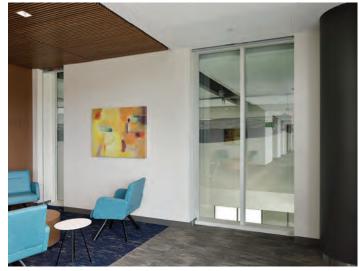



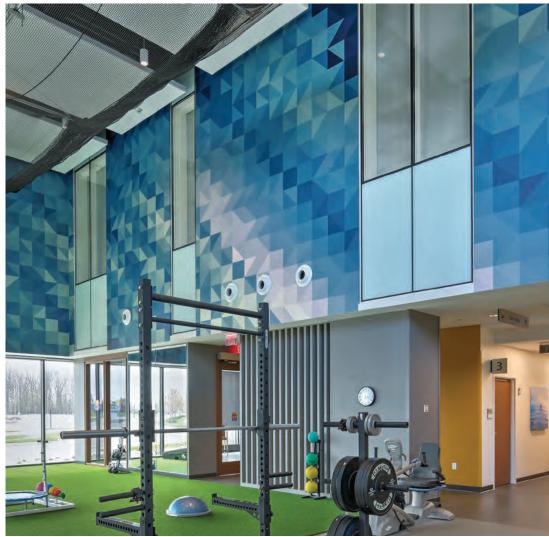

FireFighter® D200 | ThedaCare Orthopedics, Spine and Pain



# FireFighter® D200E Series

Overhead Fire Curtain with Egress

The D200E Series offers a patented and burn-tested egress feature that complies with exiting requirements of the building codes. The FireFighter D200E Series is the only protective curtain assembly on the market with a 20-minute UL 10B and 10C rating, up to 3-hour UL 10D rating, UL 1784 smoke and draft rating and integral conforming swinging egress door(s). "The First Responder" is truly a first – going beyond where others leave off!

## **Product Features**

20-minute rated UL 10B & 10C without hose stream

Up to 3-hour rated UL 10D

UL 1784 tested and listed without an artificial bottom seal

## **Code Compliance**

### CCRR-0455

ADA compliant threshold

Available with up to 8 complying swinging egress doors

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close


Widths to 60' and heights to 48'; for larger sizes and custom configurations consult the factory

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

This technology is the subject of US Patent Nos. 9,440,100; 10,145,174; 10,569,112; and 10.864.394; and has additional patents pending.

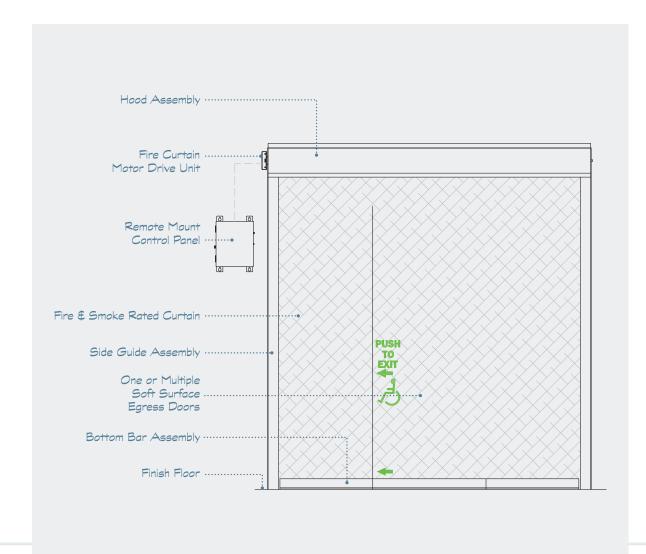

**FireFighter® Model D200E** This smoke and fire rated fabric technology employs the same type of operating system used on our steel shutter systems. Guaranteed to operate smoothly and efficiently every time. Available with up to 8 complying egress doors.

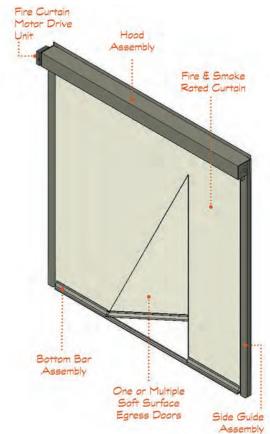







FireFighter® D200E | Bowie State University

MODEL	OPEN	SELF-CLOSE	EGRESS
D200	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A
D200E	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door
D202E - D208E*	Auto-Set® Power Operator	Fail-Safe Mechanical	2 to 8 Complying Swing Doors

<sup>\*</sup>The last digit of the model number indicates the number of swing doors.



# **SafeSpace**<sup>TM</sup> 500 Series

FEMA Wind Rated Tornado and Hurricane Resistant Door

ICC has adopted FEMA criteria for the design and construction of a safe room that provides near-absolute protection for occupants from wind and wind-borne debris. With SafeSpace 500, safe rooms and storm shelters can be constructed to FEMA 361 (4th Edition) and ICC 500 (2014 and 2020) Standards without sacrificing natural light and multi-purpose use. Utilizing McKEON's wide span engineering capabilities, this technology can protect multiple openings and is available from 4'-4" to 16'-4" wide and from 4'-0" to 18'-0" high so as not to restrict the size of windows and other openings.

## **Product Features**

Tornado Resistance: +252 / -252 PSF Tornado Impact: 100 MPH 15 lbs. Hurricane Resistance: +201 / -201 PSF Hurricane Impact: 100 MPH 9 - 15 lbs.

Large Missile Impact. Withstand a large missile impact in accordance with ASTM E1886 for FEMA 361 assemblies

Optional Fire & Smoke Rating. SafeSpace 500F and 500F-IS available with up to a 3-hour UL10B fire rating and UL1784 smoke rating when required\*

Optional Thermal Protection: SafeSpace 500F-IS

## **Code Compliance**

ICC 500 (2014 & 2020). ICC 500/NSSA Standard for the **Design & Construction of Storm Shelters** 

FEMA 361 (4th Edition). FEMA Standard for the Design and Construction of Safe Rooms for Tornadoes and Hurricanes

### **CCRR-1086**

Power motor operation


Widths from 4'-4" to 16'-4"; heights from 4'-0" to 18'-0"; for larger sizes and custom configurations consult factory

McKEON sterling gray


Powder coat of color as selected

\*Listed under the Canadian equivalent CAN/ULC S104

This technology is the subject of US Patent No. 8.453,707, 10,794,112 and 11,566,467; and has additional patents pending.

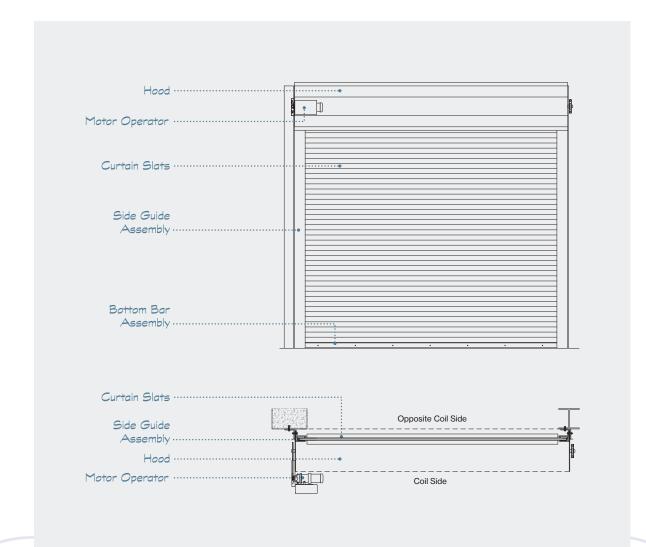

**SafeSpace™ 500** This technology is an extremely robust overhead coiling system that is in full compliance with the ICC500 Standard for storm shelters. The operating system is unique to McKEON and offers the design team multiple functional options during an emergency.

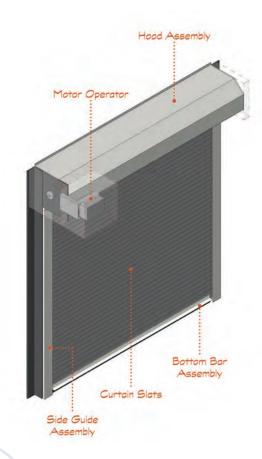







SafeSpace™ 500 | Valerie Hall Outdoor Education Center



# SafeSpace<sup>™</sup> 500X Series

## FEMA Wind Rated Tornado and Hurricane Resistant Door

The SafeSpace 500X Series are constructed of a unique blend of light weight alloy slats, robust steel frame side guides and covered headbox. These motorized storm doors comply with the latest requirements of the ICC500 provisions for protecting large openings in tornado and hurricane shelters.

Because of proprietary engineering, these assemblies can serve multiple functions in structures where security and safety are critical – beyond the parameters of the storm shelter provisions. The SS500X Series can also function as a bullet and forced entry resistant barrier. The appropriate listings and ratings are shown in the Product Features box to the right.

### **Product Features**

Tornado Resistance: +252 / -252 PSF Tornado Impact: 100 MPH 15 lbs. Hurricane Resistance: +201 / -201 PSF Hurricane Impact: 100 MPH 9 - 15 lbs.

Large Missile Impact. Withstand a large missile impact in accordance with ASTM E1886 for FEMA 361 assemblies

**ASTM F3038 Forced Entry:** 60 minutes

**UL 752 Ballistic:** Level 1

Optional Thermal Protection: SafeSpace 500X-IS

## **Code Compliance**

ICC 500 (2020). ICC 500/NSSA Standard for the Design & Construction of Storm Shelters

FEMA 361 (4th Edition). FEMA Standard for the Design and Construction of Safe Rooms for Tornadoes and Hurricanes


Power motor operation

Widths from 2'-9" to 20'-3"; heights from 3'-6" to 18'-0"; for larger sizes and custom configurations consult factory


McKEON Sterling Gray

Powder coat of color as selected

This technology is the subject of US Patent No. 8,453,707, 10,794,112 and 11.566.467; and has additional patents pending

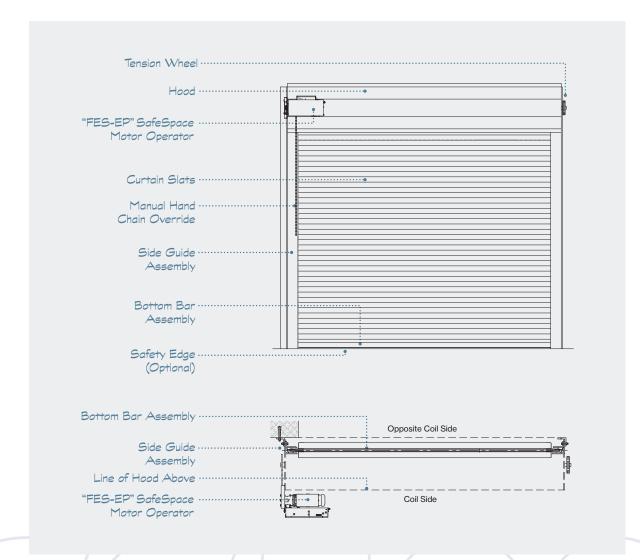

The SafeSpace 500X is completely redesigned – without the use of conventional slats. This new technology meets all the latest storm shelter provisions.

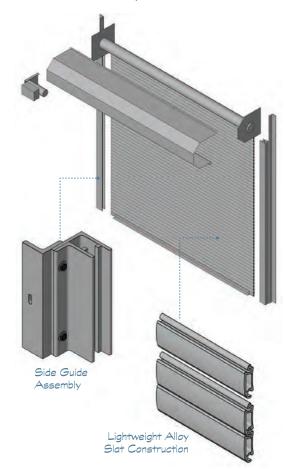

The SafeSpace 500X FEMA storm door assembly is an excellent choice for the ultimate protection of small and large openings in storm and hurricane shelters. Because of the unique configuration of the EX slat this door also complies with forced entry and ballistic resistance requirements for wide-span opening protectives. Consult the adjacent table for more information.

	SafeSpace™ 500	SafeSpace™ 500F	SafeSpace™ 500X
ICC 500 (2014)	YES	YES	N/A
ICC 500 (2020)	YES	YES	YES
FIRE RATING	N/A	3 HOURS/UL10B	N/A
HURRICANE PSF	+201 / -201	+201 / -201	+201 / -201
TORNADO PSF	+252 / -252	+252 / -252	+252 / -252
HURRICANE IMPACT	15 LBS. @ 100 MPH	15 LBS. @ 100 MPH	15 LBS. @ 100 MPH
TORNADO IMPACT	15 LBS. @ 100 MPH	15 LBS. @ 100 MPH	15 LBS. @ 100 MPH
MINIMUM SIZE	4'-4" W x 4'-0" H	4'-4" W x 4'-0" H	2'-10" W x 3'-6" H
MAXIMUM SIZE	16'-4" W x 18'-0" H	16'-4" W x 18'-0" H	20'-3" W x 18'-0" H
SLAT CONSTRUCTION	STEEL	STEEL	LIGHT WEIGHT ALLOY
<b>ASTM</b> (Forced Entry Resistant)	N/A	N/A	1 HOUR
<b>UL 752</b> (Bullet Resistant)	N/A	N/A	LEVEL 1



# Dynamic 110

Operational Wind Load Overhead Coiling Door

An operational wind load of 110 mph combined with the durability of a McKEON wide span opening protective door assembly makes this product an ideal solution in any environment. Tested and certified for door assemblies up to 30 feet wide with a wind load introduced and maintained over the duration of a complete opening and closing cycle. Ensured operation during sustained wind loads offers the end user the flexibility to use these door assemblies in virtually any structure in any application. Guarantee consistent work schedules and protect building contents without compromising occupant safety.

## **Product Features**

Operational wind load of 110 mph

Dynamic 110F available with up to a 3-hour UL10B fire rating and UL1784 smoke rating when required\*

Optional thermal protection with an R value of up to 9.3

## **Code Compliance**

CCRR-1086 applicable to Dynamic 110F

Power motor operation


Widths to 30' and heights to 48'; for larger sizes and custom configurations consult the factory

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

<sup>\*</sup>Listed under the Canadian equivalent CAN/ULC S104 This technology is the subject of US Patent Nos. 8,453,707 and 9,287,326.

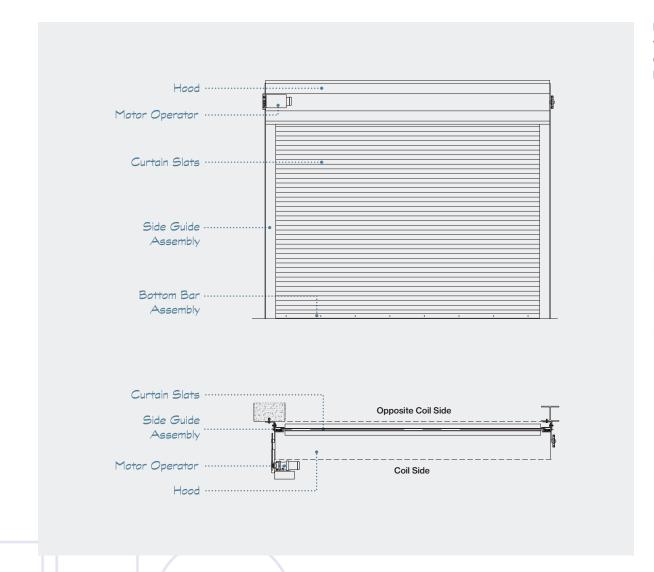

Dynamic 110™ The operational wind load is achieved with patented technology and a heavy-duty, dependable operating system. This is a door that can be used in a harsh environment.

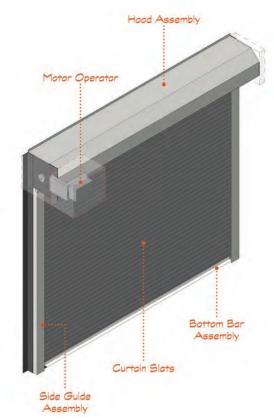







Dynamic 110™ | Nevada Army National Guard

MODEL	OPEN/CLOSE	FUNCTION
SafeSpace™ Model 500	Power Operator	Vertical coiling door for use in tornado and hurricane safe rooms and storm shelters. Steel slat construction
SafeSpace™ Model 500-IS	Power Operator	Vertical coiling insulated door for use in tornado and hurricane safe rooms and storm shelters.  Steel slat construction
SafeSpace™ Model 500F	Power Operator	3-hour fire rated vertical coiling door for use in tornado and hurricane safe rooms and storm shelters. Steel slat construction
SafeSpace™ Model 500F-IS	Power Operator	3-hour fire rated vertical coiling insulated door for use in tornado and hurricane safe rooms and storm shelters. Steel slat construction
SafeSpace™ Model 500X	Power Operated	Vertical coiling door for use in tornado and hurricane safe rooms and storm shelters. Lightweight alloy slat construction
SafeSpace™ Model 500X-IS	Power Operated	Vertical coiling insulated door for use in tornado and hurricane safe rooms and storm shelters.  Lightweight alloy slat construction
Dynamic 110™	Power Operator	Vertical coiling door – Certified to an operational wind load of 110 mph for use in extreme wind force conditions
Dynamic 110-IS™	Power Operator	Vertical coiling insulated door – Certified to an operational wind load of 110 mph for use in extreme wind force conditions
Dynamic 110F™	Power Operator	3-hour fire rated vertical coiling door – Certified to an operational wind load of 110 mph for use in extreme wind force conditions
Dynamic 110F-IS™	Power Operator	3-hour fire rated vertical coiling insulated door – Certified to an operational wind load of 110 mph for use in extreme wind force conditions



# BlastShield Model BL6000

Blast Resistant Overhead Coiling Door

The McKEON BlastShield Model BL6000 blast resistant door passed all the requirements of the ASTM F2927-21 shock tube test and achieved extremely high results for the industry.

- ASTM Damage Level Category I Peak Reflected Pressure 6 psi
- ASTM Damage Level Category II Peak Reflected Pressure 12 psi

The BlastShield BL6000 blast resistant door can be specified for use in many different applications such as educational facilities, chemical and processing facilities, pharmaceutical plants, manufacturing environments, automotive assembly plants, hazardous storage facilities, data centers, DOD, DOE and DOJ facilities, and research facilities.

## **Product Features**

### Certifications

ASTM F2927-21

UL 752, 11th Edition for ballistic, Level 1

Power motor operation


Sizes based on desired Damage Level Category, Peak Reflected Pressure and project design requirements. Consult factory for maximum sizes

### **Finishes**


**Dusky Charcoal** 

Powder Coat of any color as selected

This technology has patents pending.

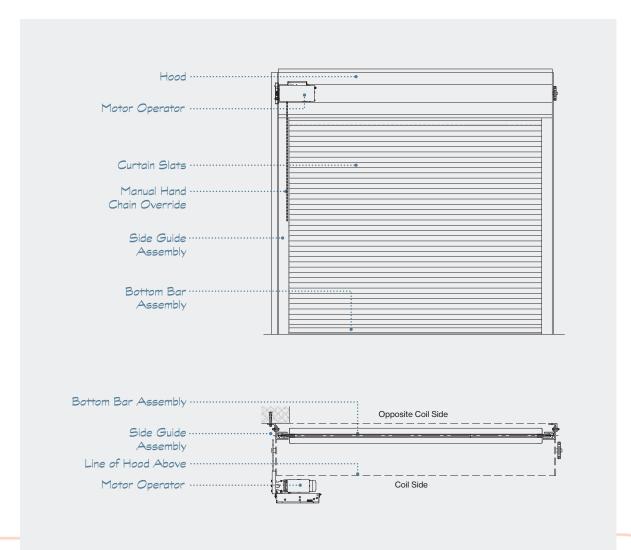

BlastShield™ Model BL6000 The actual size of these assemblies is determined based on the desired damage level category specific to the project design requirements. Constructed to withstand Peak Reflected Pressures up to 12 PSI, and tested to ASTM F2927-21 criteria, this specialized product achieved extremely high marks in the industry.

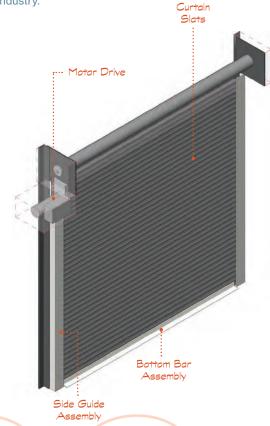





BlastShield™ Model BL6000 | Gelest Manufacturing



# BulletShield

# Models BT1000 & BT3000

**Bullet Resistant Rolling Door Assemblies** 

The McKEON BulletShield Models BT1000 and BT3000 have been tested, certified and listed as rolling door assemblies in accordance with UL 752, 11th Edition for bullet resistance ratings.

### BT1000

· Achieved a Level 1 ballistics rating providing protection from all caliber handguns up to 9mm.

### BT3000

· Achieved a Level 3 ballistics rating providing protection from large bore, large caliber handguns up to .44 magnum.

Security requirements are increasingly requiring bullet resistant doors. A Level 1 closure is often used for gas stations, transactions spaces, retail/convenience stores, and pharmacies. Level 3 closures are frequently specified in high-risk and high occupancy public buildings, including schools, banks and government facilities.

### **Product Features**

### Certifications

UL 752, 11th Edition for ballistic ratings:

BT1000, Level 1

BT3000. Level 3

ASTM F3038 for 60 minutes

## Operation

Motorized closing system - automatic self-closing or localized control station operation

Hand chain - emergency manual override

Programmable delayed automatic closing

Optional security modes - standard or enhanced

Widths to 23' and heights to 48'; for larger sizes and custom configurations consult factory


### **Finishes**

McKEON Sterling Gray

Powder Coat of any color as selected

This technology has patents pending


**■ BulletShield<sup>™</sup> BT3000** | Intertek Laboratory

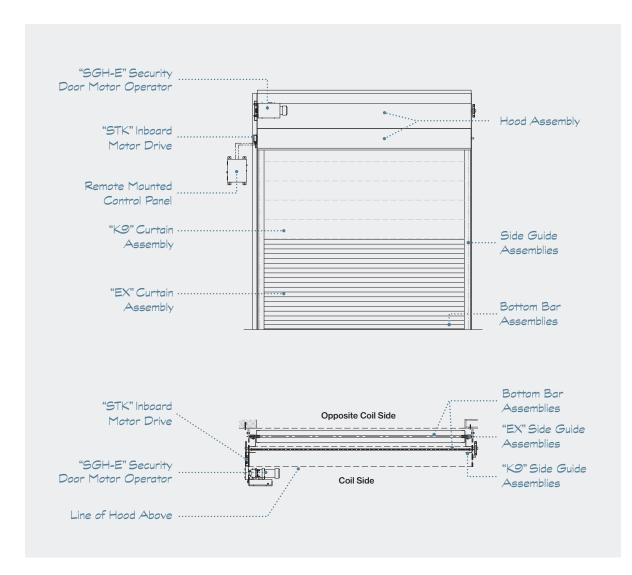





BulletShield™ Model BT1000 This model easily functions as a high cycle rolling door assembly with a Level 1 ballistic rating. Tested, certifiedn and listed, it is always ready to protect its assigned space.

BulletShield™ Model BT3000 This model is extremely robust and dependable to operate. The BT3000 is enhanced with the superimposed McKEON spall shield enabling the Level 3 ballistic rating.

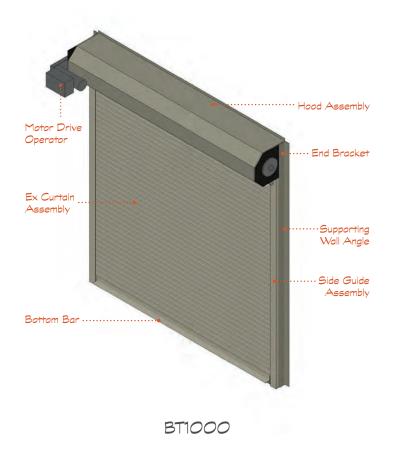

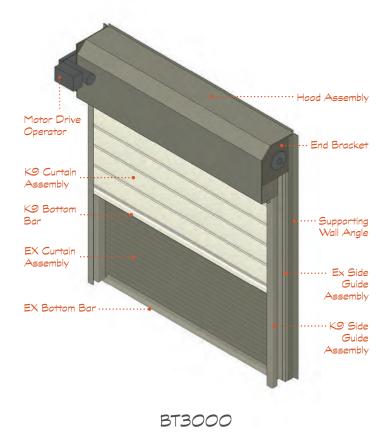

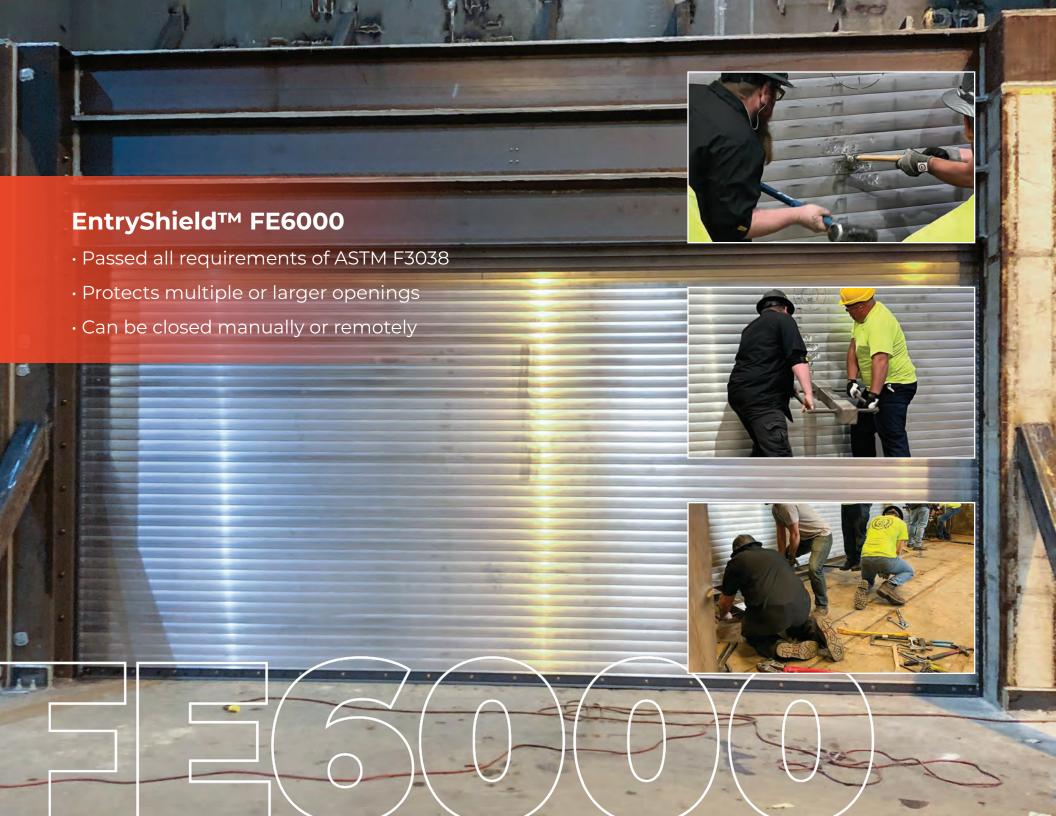

# EntryShield Model FE6000

Forced Entry Resistant Overhead Coiling Door

The McKEON EntryShield Model FE6000 forced entry resistant door passed all the requirements of the ASTM F3038, Standard Test Method for Timed Evaluation of Forced-Entry-Resistant Systems.

- Laboratory tested, certified and listed for compliance with ASTM F3038 for 60 minutes
- Largest successfully tested overhead coiling door in the industry
- During an emergency the overhead coiling assembly can be motor-closed with a manual push-button, or closed remotely by an automatic closing actuating device

The following are four broad categories of buildings requiring safeguards against forced entry to protect occupants and property:

- Hospitality
- Commercial / Retail
- Educational
- Government

## **Product Features**

### Certifications

ASTM F2927-21

UL 752, 11th Edition for ballistic, Level 1

Power motor operation and/or automatic-closing

Up to 20'-3" in width and 18'-0" in height


### **Finishes**

McKEON Sterling Gray


Powder Coat of any color as selected


This technology has patents pending

**<sup>■</sup> EntryShield<sup>™</sup> Model FE6000** | Intertek Laboratory

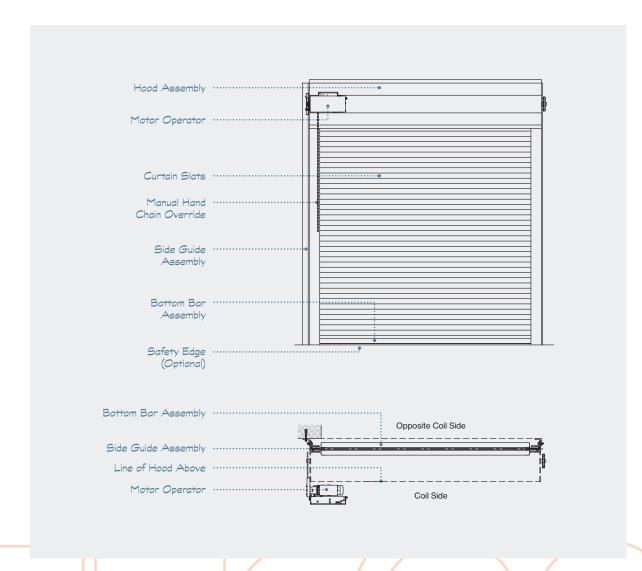

EntryShield™ Model FE6000 A vertical rolling door assembly is the perfect configuration for resisting forced entry. The door descends from a securely mounted barrel assembly along a significantly sized side-guide vertical raceway. The bottom of the door is reinforced with heavy steel. Together with the robust, inter-connected slat configuration large openings are guaranteed to be protected from intruders.

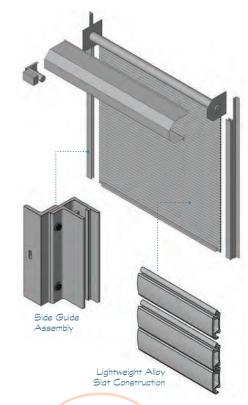

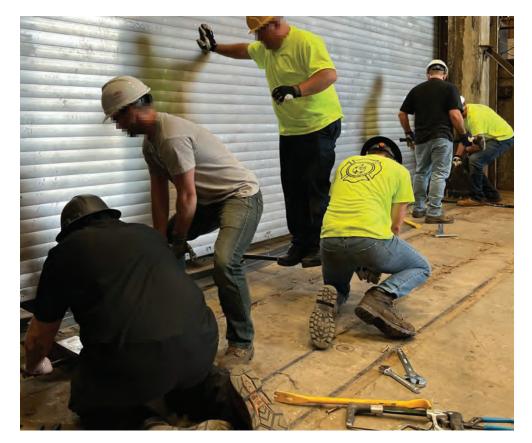



MODEL	OPEN/CLOSE	FUNCTION
BL6000	Motor Operation	Blast Resistant Overhead Coiling Door
BT1000	Motor Operation	Overhead Coiling Level 1 Bullet Resistant Door
BT3000	Motor Operation	Overhead Coiling Level 3 Bullet Resistant Door
FE6000	Motor Operation	Forced Entry Resistant Overhead Coiling Door



# Service & Security Doors

McKEON offers a wide selection of non-fire rated custom service doors. These assemblies can be manufactured in literally any size or for any function including insulated and sound rated, with either solid or perforated slats. All of these slat configurations are available in 16, 18, 20 or 22 gauge. Finishes include McKEON galvanized standard sterling gray, custom powder coat of color as selected, stainless steel No. 4 polish or No. 8 mirror finish, anodized or powder-coat aluminum. Service doors can be oriented to any custom-fit scenario - vertical coiling, side acting, side coiling or horizontal coiling.



Model PF3000 | Macy's Summerlin



Model PF3000 | Seattle Public Library



Model SC3000PF | Montgomery Spa



CS3000 Series | The Deck, Las Vegas








Model SD3000E | Northwood Middle School

HS100 Series | NASA Vertical Assembly Building


MODEL	OPEN/CLOSE	FUNCTION
PF1000	Power Operator	Vertical coiling, perforated, self-opening security door
PF3000	Power or Manual* Operator	Vertical coiling perforated security door
SD3000	Power or Manual* Operator	Vertical coiling service door
CS3000	Power or Manual* Operator	Vertical coiling service counter shutter
IS3000	Power or Manual* Operator	Vertical coiling insulated service door – insulated for sound & temperature abatement; self-opening available
HS100	Power Operator	Horizontal coiling service door
HSL 150 (Curved)	Power Operator	Horizontal and vertical coiling service door with curve

<sup>\*</sup>Manual operation is limited by size, consult the factory.

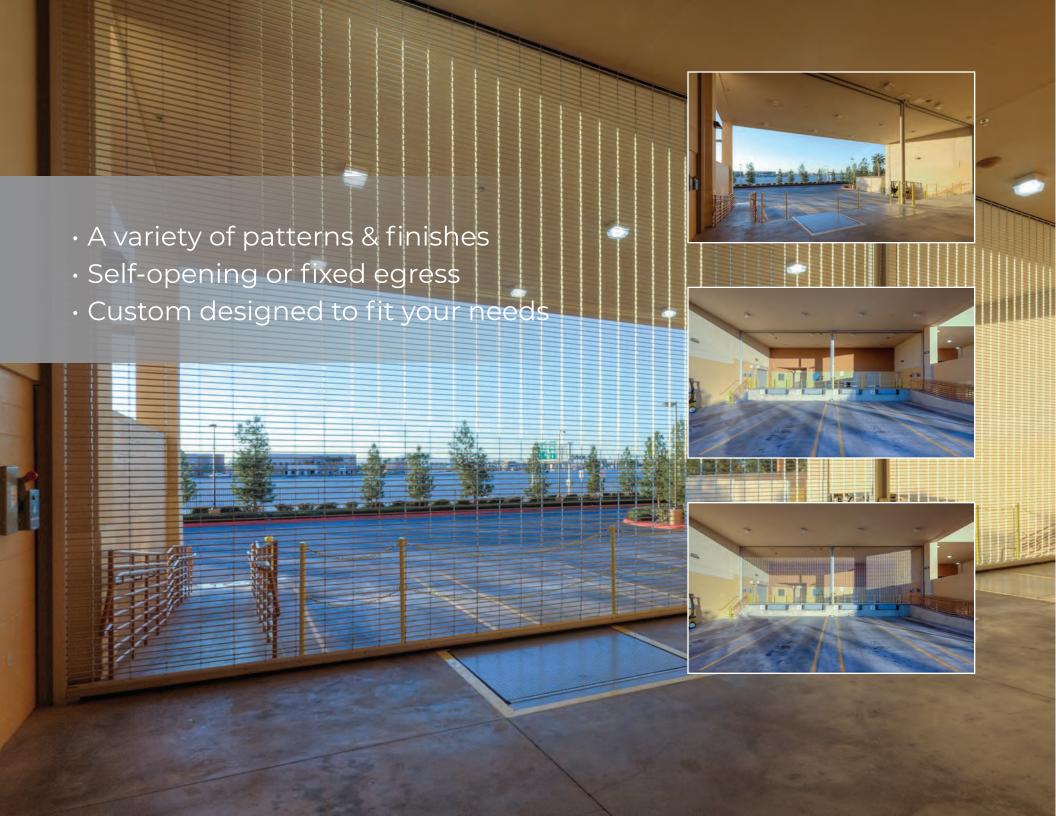

# Security Grilles

McKEON grille assemblies are custom-designed to meet your specific needs. There are more than six curtain patterns and anodized finishes to chose from, either vertical or side coiling. The self-opening models are designed to provide exiting when security is desired in the path of the means of egress. Using fail-safe mechanical technology a self-opening grille will provide adequate egress in the path of exit every time.

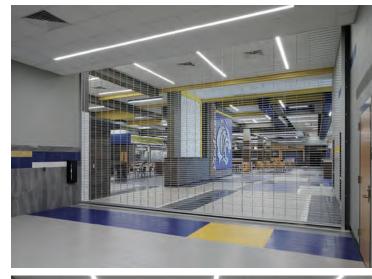



SafeScape® G1000 | Piedmont High School



SG3000 | Aliante Casino + Hotel





**SG3000** | University of Wisconsin – Milwaukee Student Union








SC3000G | University of Oregon Student Union Building

Safescape® Model G4500 | Mills High School

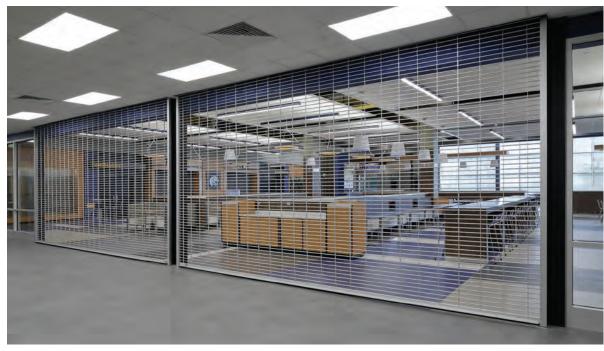



SG3000 | Piedmont High School

SG3000 | Liberty High School

MODEL	OPEN/CLOSE	EGRESS	FUNCTION
SG3000	Power or Manual* Operator	N/A	Vertical coiling security grille
G1000	Power Operator	Fail-safe mechanical open	Vertical coiling, self-opening security grille
G1500	Power Operator	Fail-safe mechanical open and swing doors	Vertical coiling, self-opening security grille with deployable swinging egress door(s)
SC3000G	Power Operator	N/A	Side coiling security grille
G4000	Power Operator	Fail-safe mechanical open	Side coiling, self-opening security grille
G4500	Power Operator	Fail-safe mechanical open and/or swing doors	Side coiling, self-opening security grille with fixed swinging egress door(s)

 $<sup>^{\</sup>star}\text{Manual operation}$  is limited by size, consult the factory.





## **Corporate Headquarters**

44 Sawgrass Drive

Bellport, NY 11713 USA

Phone: 800-266-9392

Fax: 631-803-3030

Email: Info@McKeonDoor.com

www.McKeonDoor.com

## **Regional Offices**

New York City

Los Angeles

Las Vegas

Norfolk

Salt Lake City

Washington, DC