
FIRE & SMOKE RATED CURTAIN SYSTEMS

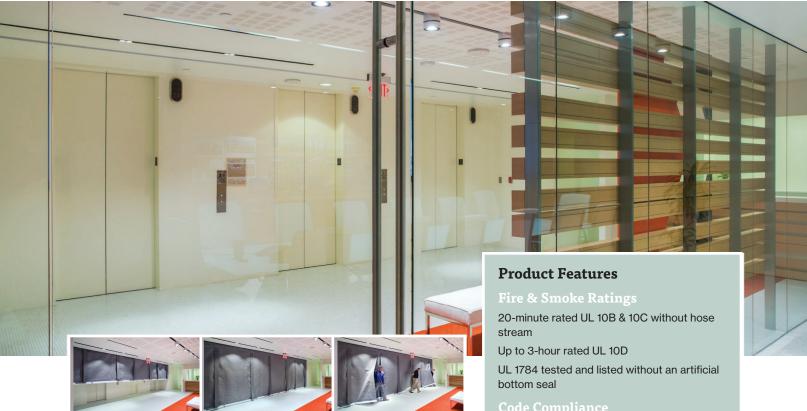

FireFighter® Model D200E

Vertical Coiling Opening Protective with Egress

The D200E offers a patented and burn-tested egress feature that complies with exiting requirements of the building codes. The FireFighter D200E Series is the only protective curtain assembly on the market with a 20-minute rating UL10B and UL10C without hose stream, up to 3-hour UL 10D rating, UL 1784 smoke and draft rating and integral conforming swinging egress door(s). "The First Responder" is truly a first - going beyond where others leave off!

Code Compliance

Code Compliance Research Report CCRR-

ADA compliant threshold

Available with up to 8 complying swinging egress doors

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Widths to 60' and heights to 48'; for larger sizes and custom configurations consult the

McKEON Sterling Gray


Powder Coat of any color as selected

Stainless Steel - No. 4 Polish or No. 8 Mirror

This technology is the subject of US Patent Nos. 9,440,100; 10,145,174; 10,569,112; and 10,864,394; and has additional patents pending




FIRE & SMOKE RATED CURTAIN SYSTEMS

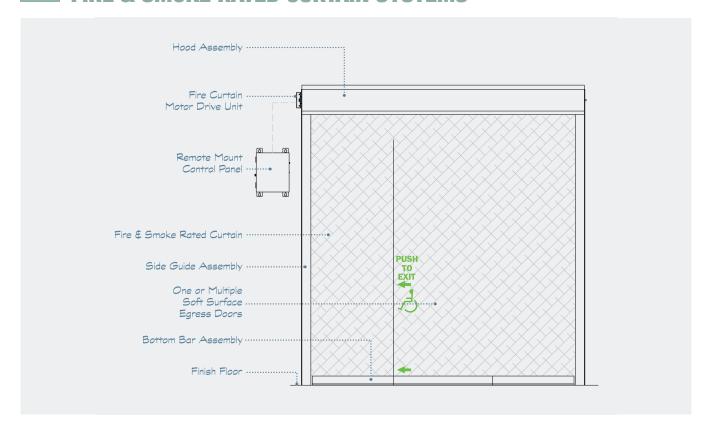

The McKEON D200E side guide configuration, with a maximum of a 1/2" reveal, can be surface or flush mounted making it virtually invisible in any application.



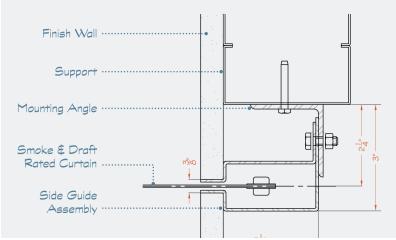

MODEL	OPEN	SELF-CLOSE	EGRESS
D200E	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door
D202E - D208E*	Auto-Set® Power Operator	Fail-Safe Mechanical	2 to 8 Complying Swing Doors

^{*}The last digit of the model number indicates the number of swing doors

