
### IIIIIIII SIDE ACTING FIRE DOOR SYSTEMS

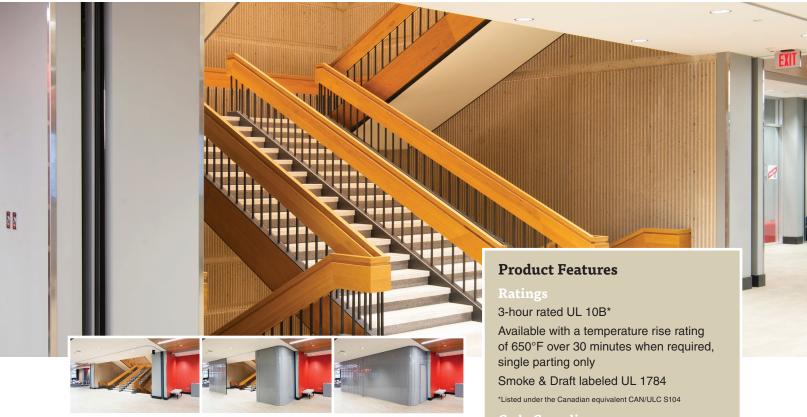

# S7000 Series

Side Sliding with & without Egress

S7000 Series fire door systems are available in both manual or motor operated designs and with or without swinging egress doors. S7000 Series doors are side acting therefore ideal for openings in fire walls where headroom is limited. The side activated design enables these fire doors to navigate around tight curves and contoured openings.

#### **Code Compliance**

CCRR-1086

ADA compliant

#### Egress

Available with multiple fixed complying swinging egress doors when required

#### Operation

Auto-Set® automatic resetting

Fail-Safe Design - automatic self-closing mechanism does not require power operation to self-close

Manual operation for assemblies up to 10' x 10'

#### Size

Widths to 80' (160' bi-parting) and heights to 24'; for larger sizes and custom configurations consult the factory

Negotiates radius curves: 3'-0" with egress doors; 1'-6" without egress doors


#### Finishes

McKEON Sterling Gray Powder Coat of any color as selected Stainless Steel – No. 4 Polish or No. 8 Mirror

This technology is the subject of US Patent Nos. 8,307,877 - 9,267,326



## **IIIIIIII SIDE ACTING FIRE DOOR SYSTEMS**

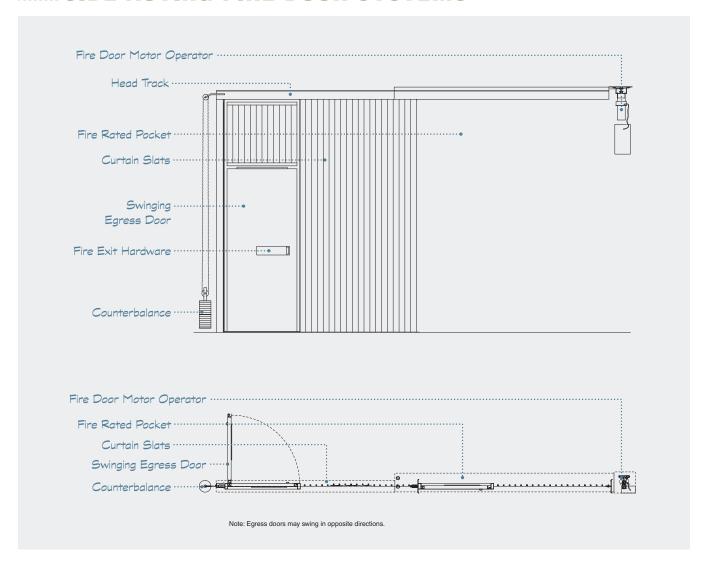

MODEL	OPEN	SELF-CLOSE	EGRESS	FUNCTION
S7200	Manual Push-open	Fail-Safe Mechanical	N/A	Side Sliding
S7400	Manual Push-open	Fail-Safe Mechanical	1 Complying Swing Door*	Side Sliding
S7500	Manual Push-open	Fail-Safe Mechanical	2 Complying Swing Doors*	Side Sliding
S7600	Auto-Set® Power Operator	Fail-Safe Mechanical	N/A	Side Sliding
S7700	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door*	Side Sliding
S7900	Auto-Set® Power Operator	Fail-Safe Mechanical	Multiple Complying Swing Doors	Side Sliding

<sup>\*</sup>Maximum swing door width is 48"

